

- 2/2-way pinch valve
- Bidirectional operation possible
- No dead spaces & no blockages
- Low power consumption



TECHNICAL DATA


Function	2/2 NC
Tubing	1/32 ID x 3/32 OD
Weight	90 g
Mounting position	any
Operating pressure	0 – 2 bar(g)
Temperature range, environment	-29 – 70 °C
Temperature range, medium	-29 – 70 °C
Temperature range, storage	-29 – 70 °C
Media	Air, gases, and water, others on request ¹



ELECTRICAL DATA

Electrical connection	Flying leads
Length electrical connection	450 mm
Nominal voltage	12 V DC
Nominal power consumption	1.5 W


PNEUMATIC SYMBOL



WETTED MATERIALS

Tubing	Silikon
--------	---------

¹ Due to the use of resistant materials, the valve is suitable for many other media (including liquids) after prior testing. Please contact us for more information.

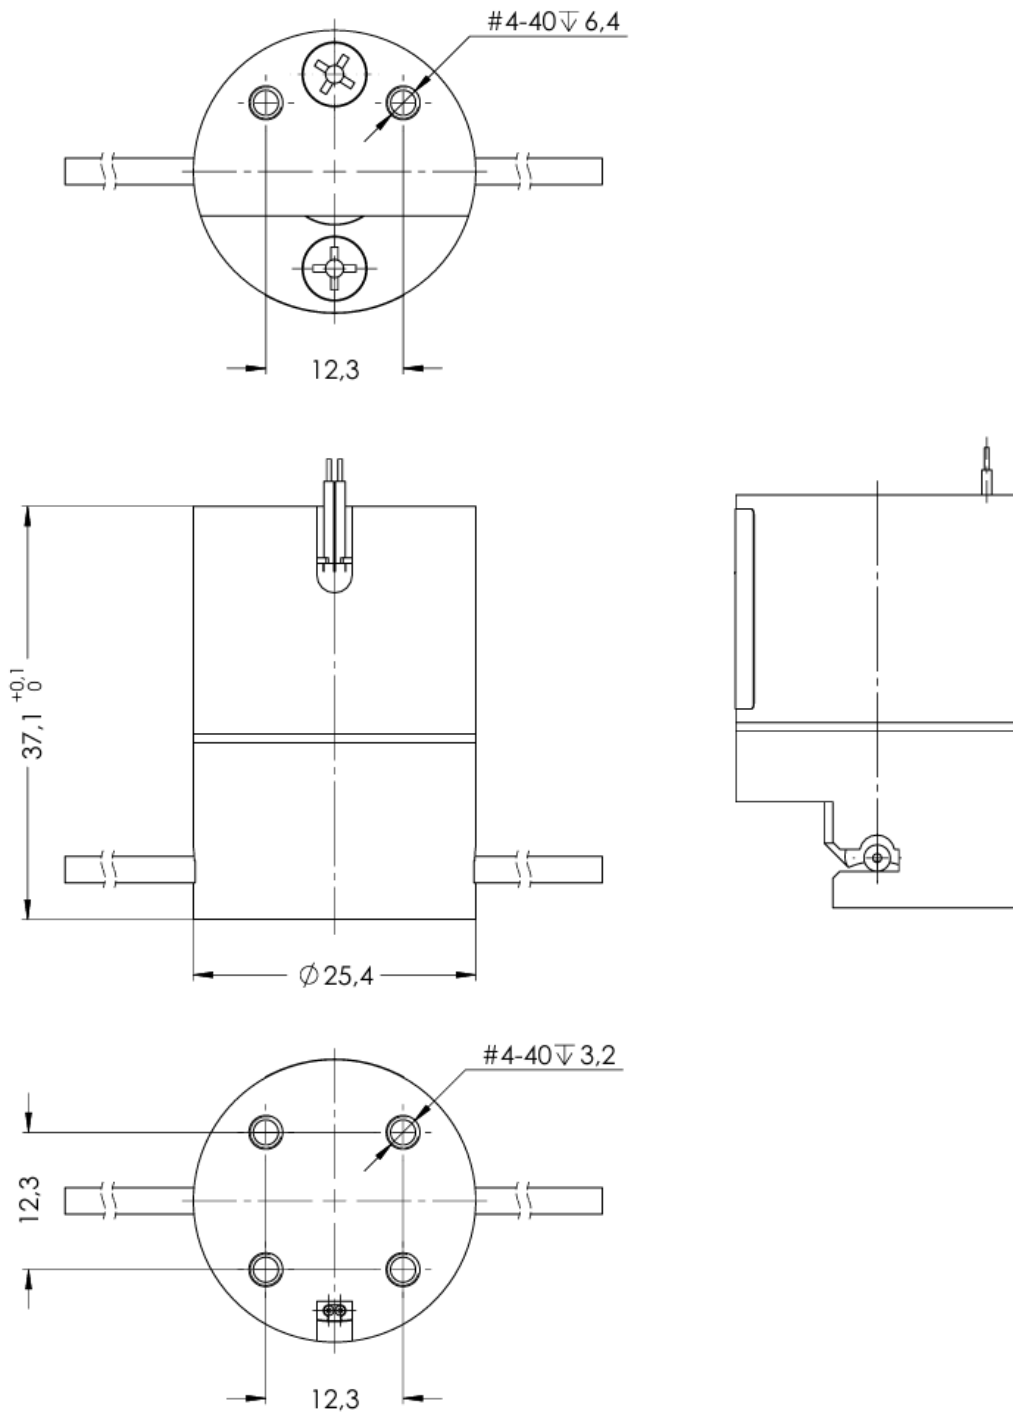

Each valve is supplied with a pre-assembled 30 cm silicone tubing.

The technical information given describes the usual properties of our products and does not constitute a warranty statement. All values were determined under laboratory conditions and must be verified by the customer for his specific purpose. Due to continuous technical progress, all rights to changes and additions are reserved.

Status: 2026-05-10