


MULTISTAGE CENTRIFUGAL PUMPS CV series

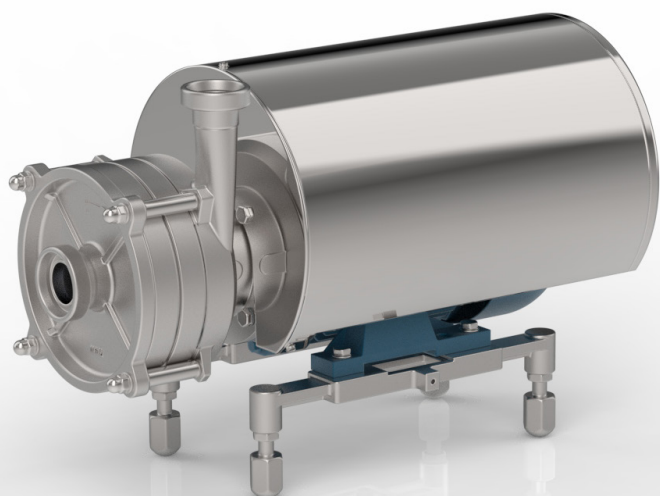

Horizontal multistage CV with adjustable feet and shroud.

Multistage centrifugal pumps with closed impeller for medium and high heads.

Closed coupled design with closed impellers, directly mounted on to the motor shaft.

Setting up in horizontal and vertical way for every requirement of installation.

Industrial construction with motor shroud and adjustable feet on request.

Wetted parts in CF-8M 1.4408 / AISI 316 stainless steel, investment cast and electro-chemically polished.

ATEX-compliant versions also available on request.

Suitable for industrial or foodstuffs applications where 316 stainless is necessary, but without any particular cleaning or sterility requirements.

These remarkably sturdy and cost effective pumps are perfect for applications where hygiene is of low importance.

The closed impellers are not able to handle products which contain solids or highly viscous liquids.

Widely used in cleaning & washing systems, fluid filtration, general transfer, feeding, water treatment.



Multistage CV 11....28 pumps vertical exec.

TECHNICAL DATA

Flow rates up to 12 m³/h
Heads up to 140 mH₂O.
Design pressure 16 bar
Temperature range: -10°C ÷ +120°C

Seals:

Mechanical seals standardized to EN 12756, ISO 3069 standards

Single internal mechanical seal


Seal materials (FDA and Regulation (EC) No. 1935/2004):

Ethylene propylene (EPDM)
Fluorocarbon (FPM-FKM)
Silicone
NBR

Connections:


DIN - SMS - IDF - BS / RJT - DS - CLAMP and EN 1092-1 PN 16 flanges suitable for all international standards.

GENERAL DIAGRAMS
(Performance applies to H₂O at 20 °C, 1013 mbar, Data not binding)

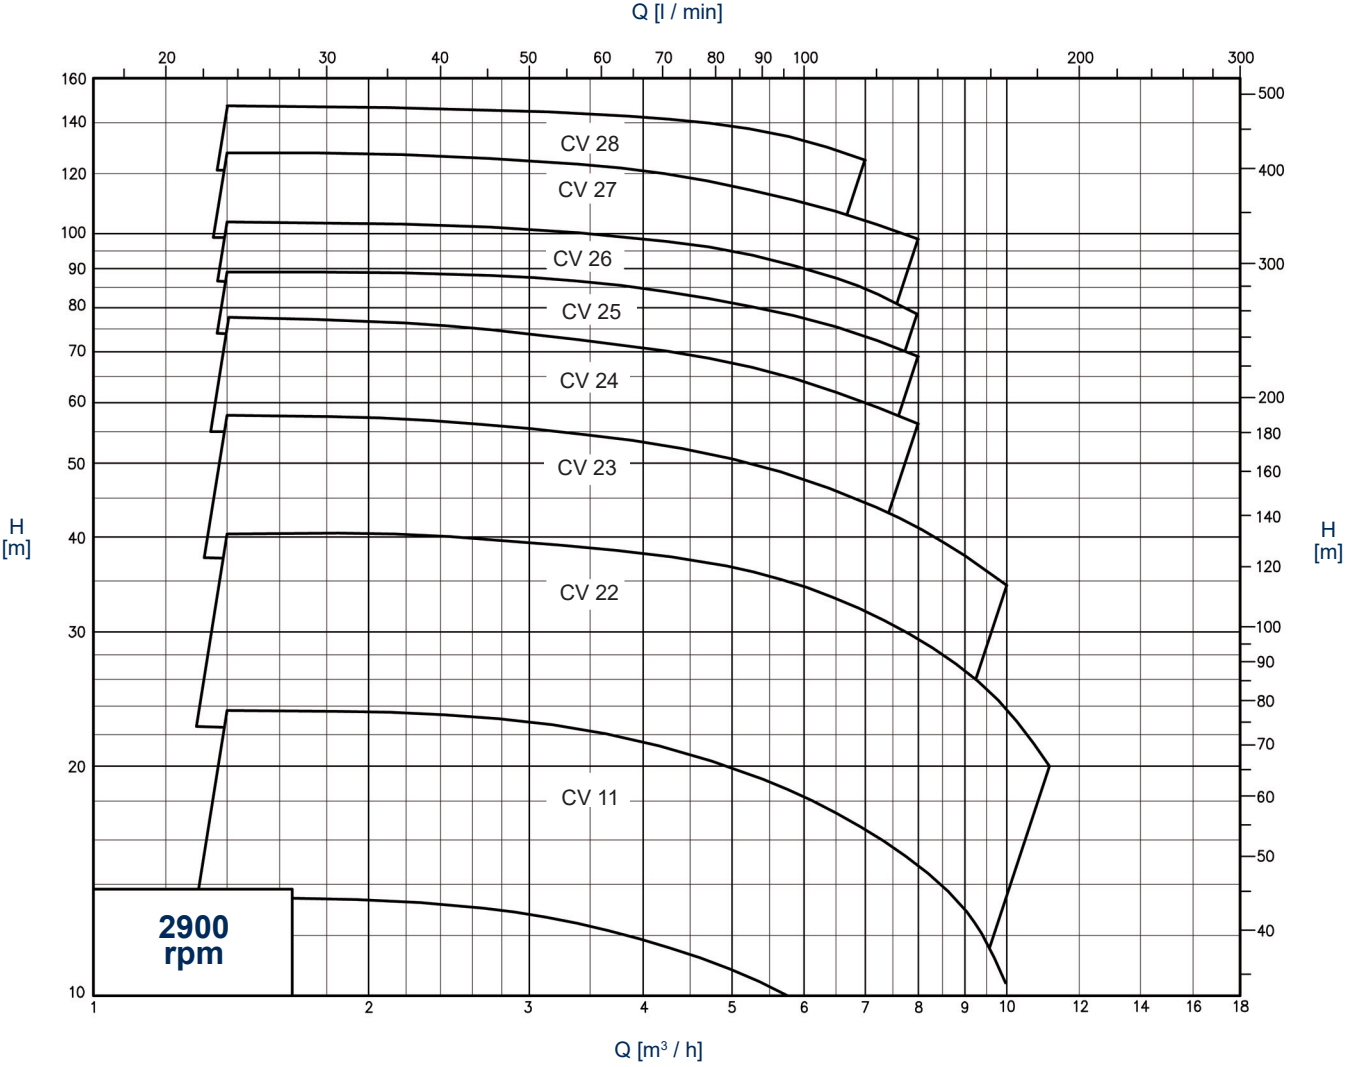


OVERALL DIMENSIONS

Dimensions not binding - DN = DIN 11851 male threaded connections


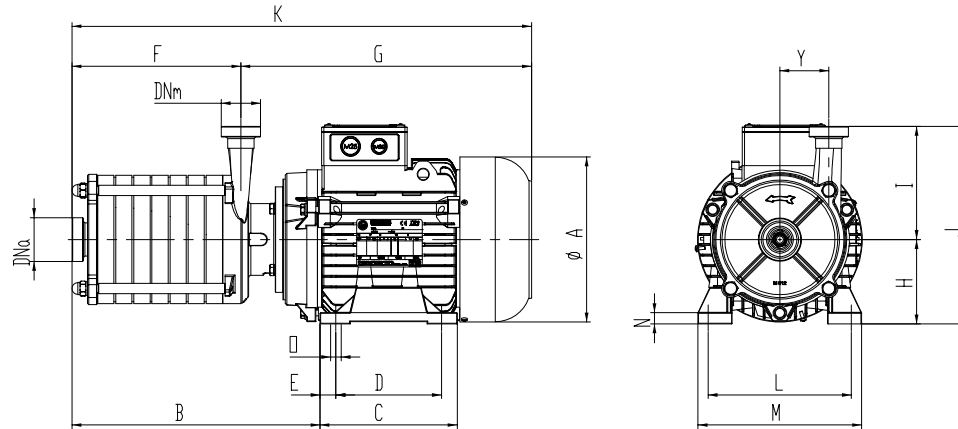


Pump type		kW	DN _a	DN _m	ØA	B	C	D	E	F	G	K	H	J	I	L	M	N	O	Y
CV 11	2900 rpm	1,1	32	25	178	153	155	100	15	56	318,5	374,5	90	240	150	140	158	13	10	65
CV 22		1,5	32	25	178	177	155	100	15	80	318,5	398,5	90	240	150	140	158	13	10	65
CV 23		2,2	32	25	178	201	155	125	15	104	343,5	447,5	90	240	150	140	158	13	10	65
CV 23		3	32	25	194	210	164	140	12	104	373,5	477,5	100	250	150	159	193	13	12	65
CV 24		3	32	25	194	234	164	140	12	128	373,5	501,5	100	250	150	159	193	13	12	65
CV 25		4	32	25	194	258	164	140	12	152	373,5	525,5	100	250	150	159	193	13	12	65
CV 25		5,5	32	25	219	257	182	140	21	152	385	537	112	262	150	190	217	15	14	65
CV 26		4	32	25	194	282	164	140	12	176	373,5	549,5	100	250	150	159	193	13	12	65
CV 26		5,5	32	25	219	281	182	140	21	176	385,5	561,5	112	262	150	190	217	15	14	65
CV 27		5,5	32	25	219	305	182	140	21	200	385,5	585,5	112	262	150	190	217	15	14	65
CV 28		5,5	32	25	219	329	182	140	21	224	385,5	609,5	112	262	150	190	217	15	14	65

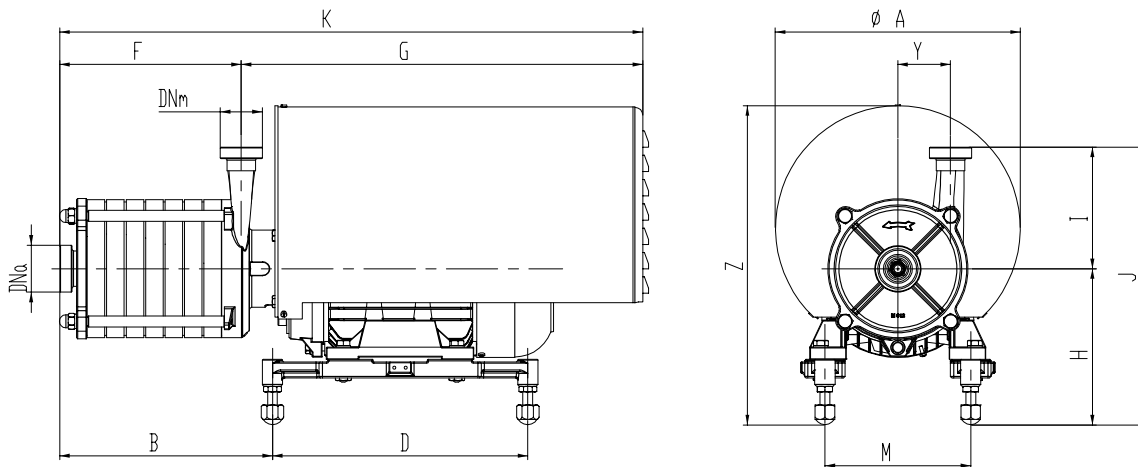

Pump type		kW	DN _a	DN _m	ØA	B	D	F	G	H	I	K	J	M	Y	Z
CV 11	2900 rpm	1,1	32	25	240	95,5	270	56	392,5	178	150	448,5	328	140	65	326
CV 22		1,5	32	25	240	119,5	270	80	392,5	178	150	472,5	328	140	65	326
CV 23		2,2	32	25	240	143,5	270	104	392,5	178	150	496,5	328	140	65	326
CV 23		3	32	25	302,5	149,5	285	104	495,5	188	150	599,5	338	149	65	389
CV 24		3	32	25	302,5	173,5	285	128	495,5	188	150	623,5	338	149	65	389
CV 25		4	32	25	302,5	197,5	285	152	495,5	188	150	647,5	338	149	65	389
CV 25		5,5	32	25	302,5	190,5	315	152	495,5	193	150	647,5	343	180	65	394
CV 26		4	32	25	302,5	221,5	285	176	495,5	188	150	671,5	338	149	65	389
CV 26		5,5	32	25	302,5	214,5	315	176	495,5	193	150	671,5	343	180	65	394
CV 27		5,5	32	25	302,5	238,5	315	200	495,5	193	150	695,5	343	180	65	394
CV 28		5,5	32	25	302,5	262,5	315	224	495,5	193	150	719,5	343	180	65	394

Outlet port position ref. a = standard exec.
ref. b - c - d = exec. on request

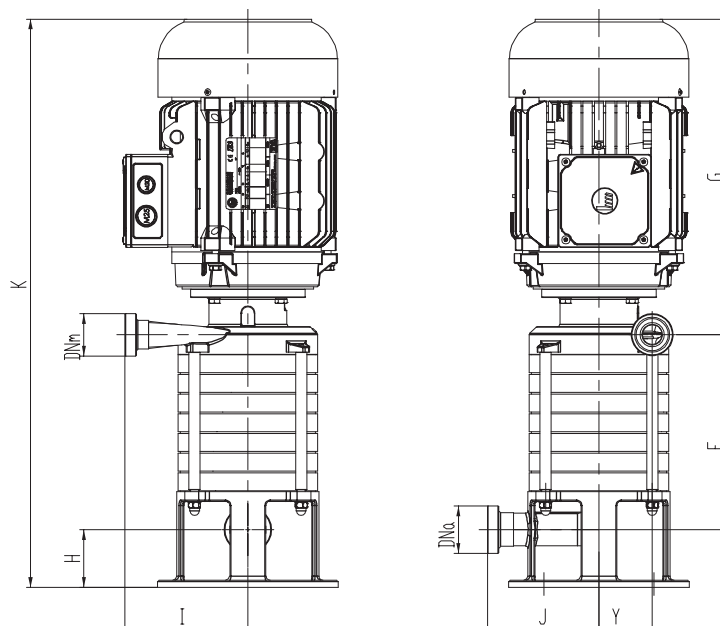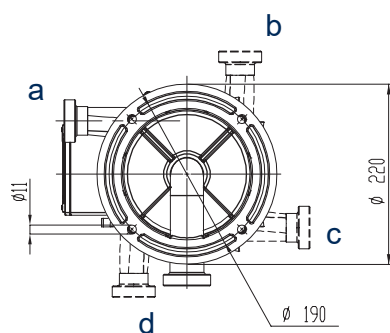

Pump type		kW	DNa	DNm	F	G	H	I	J	K	Y
CV 11 V	2900 rpm	1,1	32	25	69,5	318,5	70,5	150	136	458,5	65
CV 22 V		1,5	32	25	93,5	318,5	70,5	150	136	482,5	65
CV 23 V		2,2	32	25	117,5	343,5	70,5	150	136	531,5	65
CV 23 V		3	32	25	117,5	373,5	70,5	150	136	561,5	65
CV 24 V		3	32	25	141,5	373,5	70,5	150	136	585,5	65
CV 25 V		4	32	25	165,5	373,5	70,5	150	136	609,5	65
CV 25 V		5,5	32	25	165,5	385	70,5	150	136	621	65
CV 26 V		4	32	25	189,5	373,5	70,5	150	136	633,5	65
CV 26 V		5,5	32	25	189,5	385	70,5	150	136	645	65
CV 27 V		5,5	32	25	213,5	385	70,5	150	136	669	65
CV 28 V		5,5	32	25	237,5	385	70,5	150	136	693	65