

P-SERIES - P18 S



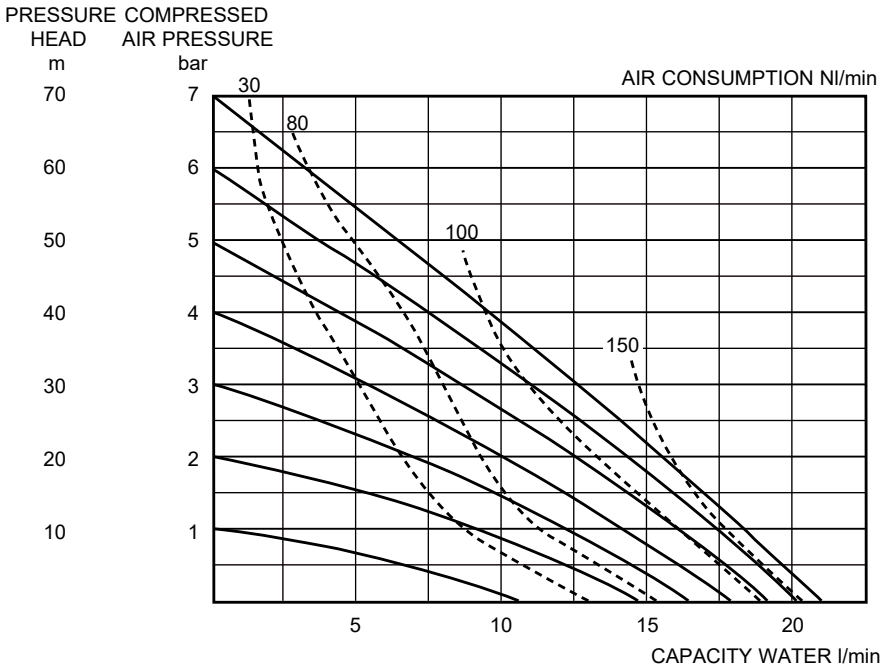

Please note that when a pump is fitted with Teflon®
diaphragms, a capacity reduction of up to 15% may occur.

MATERIAL			SPECIFICATION						
Pump housing	Diaphragms	Valve balls	Max capacity	Max working pressure	Max Temp.	Liquid connection	Air connection	Particle size max.	Weight
SS316L	PTFE, Buna-N, EPDM, Viton®	PTFE, Buna-N, EPDM, Viton®	20 l/min	10 bar	100 °C	R½" male TC 1", mini TC	R¼" female	3 mm	7 kg

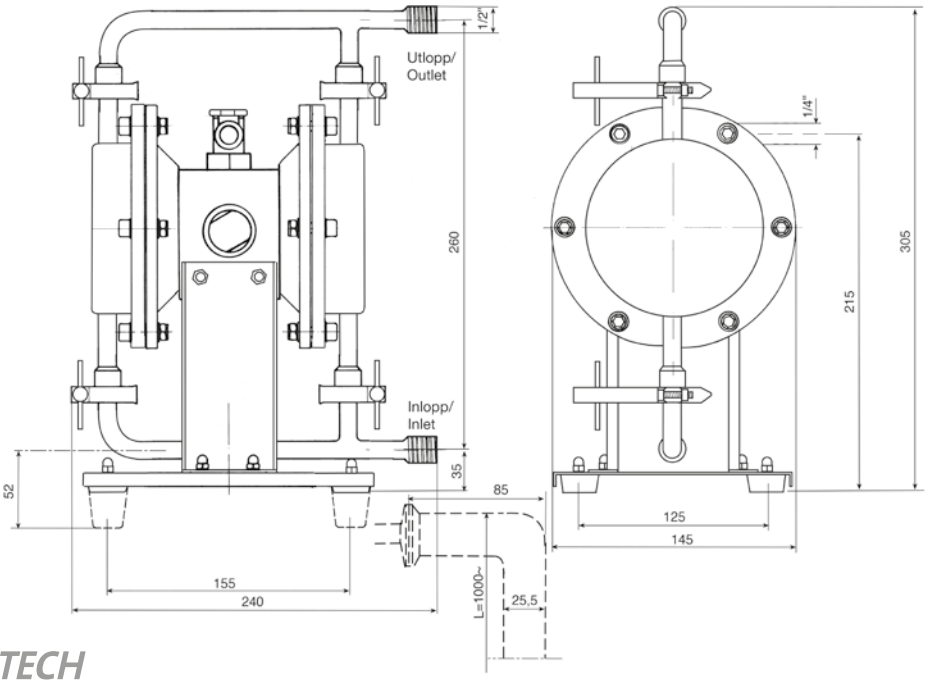

EC 1935/2004

FDA

Ex

Colly FLOWTECH
INNOVATIV FLÖDESTEKNIK

Edition 2021-04-22

Postal address
Colly Flowtech AB
Grossistgatan 3
553 02 JÖNKÖPING

Delivery address
Colly Flowtech AB
Grossistgatan 3
553 02 JÖNKÖPING

Telephone
+46 (0)36-18 11 60

E-mail
info@collyflowtech.se
Web
www.collyflowtech.se

VAT nr
556506-7948

CERTIFIERAT LEDNINGSSYSTEM
DNV·GL
ISO 9001 ISO 14001