

P-SERIES - P30 S



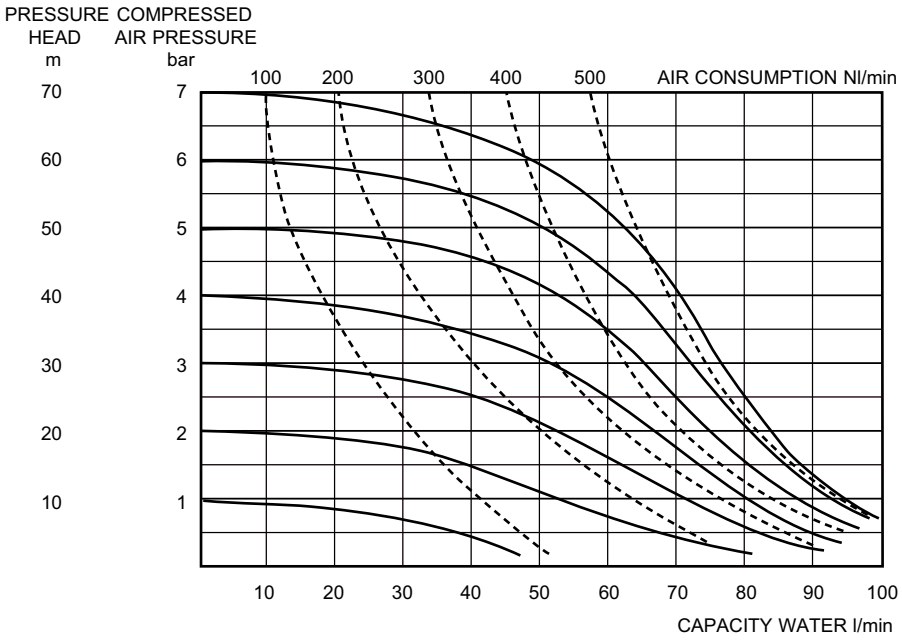

Please note that when a pump is fitted with Teflon®
diaphragms, a capacity reduction of up to 15% may occur.

MATERIAL			SPECIFICATION						
Pump housing	Diaphragms	Valve balls	Max capacity	Max working pressure	Max Temp.	Liquid connection	Air connection	Particle size max.	Weight
SS316L	PTFE, Buna-N, EPDM, Viton®	PTFE, Buna-N, EPDM, Viton®	100 l/min	10 bar	100 °C	R1" male SMS25 TC 1"	R¼" female	5 mm	14 kg

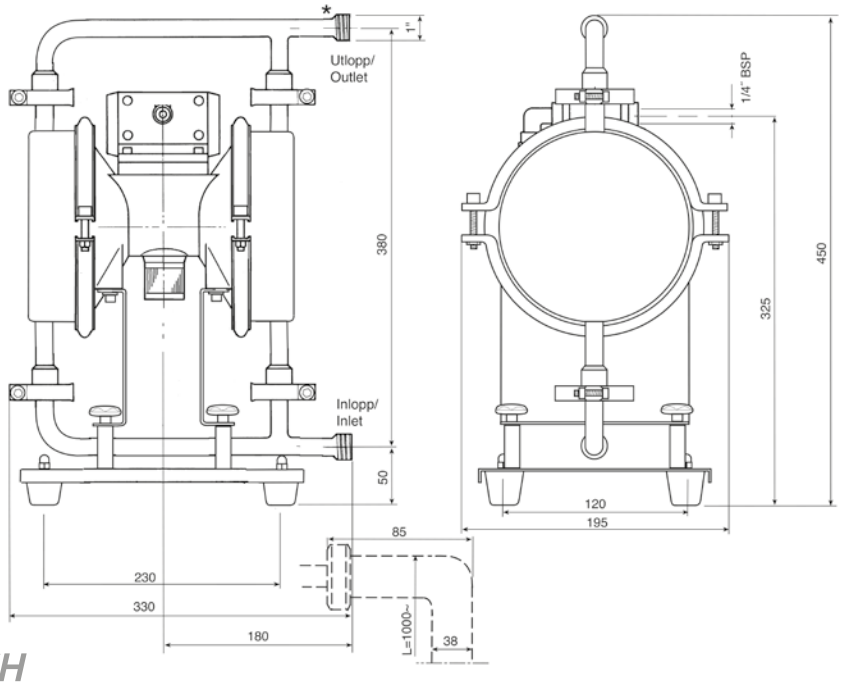

Colly FLOWTECH
INNOVATIV FLÖDESTEKNIK

Edition 2021-04-22

Postal address
Colly Flowtech AB
Grossistgatan 3
553 02 JÖNKÖPING

Delivery address
Colly Flowtech AB
Grossistgatan 3
553 02 JÖNKÖPING

Telephone
+46 (0)36-18 11 60

E-mail
info@collyflowtech.se
Web
www.collyflowtech.se

VAT nr
556506-7948

CERTIFIERAT LEDNINGSSYSTEM
DNV·GL
ISO 9001 ISO 14001