


# E1 DATA SHEET

## SPECIFICATIONS & PERFORMANCE

## 1" Bolted Metal – Food Processing ATEX with Metal Center Section

### PERFORMANCE

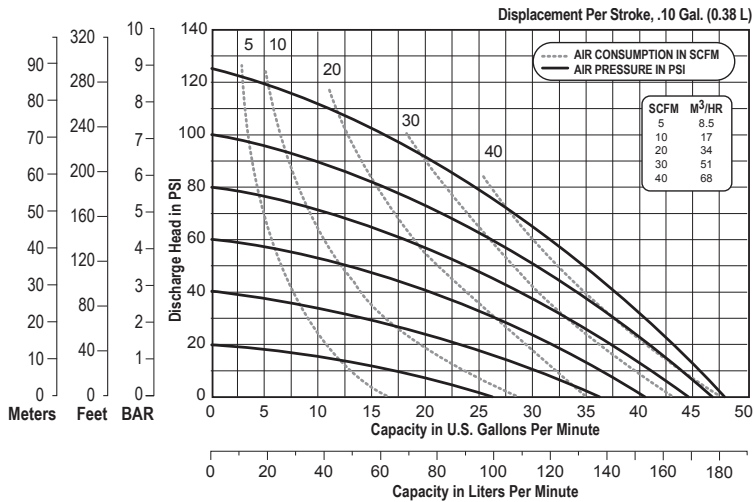

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

### SPECIFICATIONS

#### Flow Rate

Adjustable to . 0-49 gpm (185.5 lpm)

#### Port Size

Suction . . . . . 1½" TRI-CLAMP

Discharge . . . . . 1½" TRI-CLAMP

Air Inlet . . . . . 3/8" NPT

Air Exhaust . . . . . 1/2" NPT

#### Suction Lift

Dry . . . . . 16' (4.9 m)

Wet . . . . . 31' (9.4 m)

#### Max Solid Size (Diameter)



. . . . . 1/8" (3.1 mm)

Max Noise Level . . . . . 93 dB(A)

#### Shipping Weights

Stainless Steel . . . 36 lbs (16.3 kg)

### DIMENSIONS

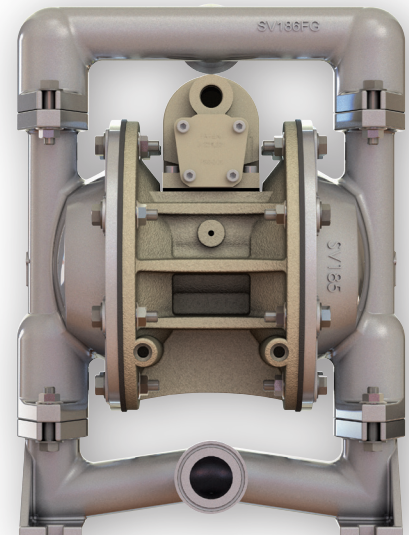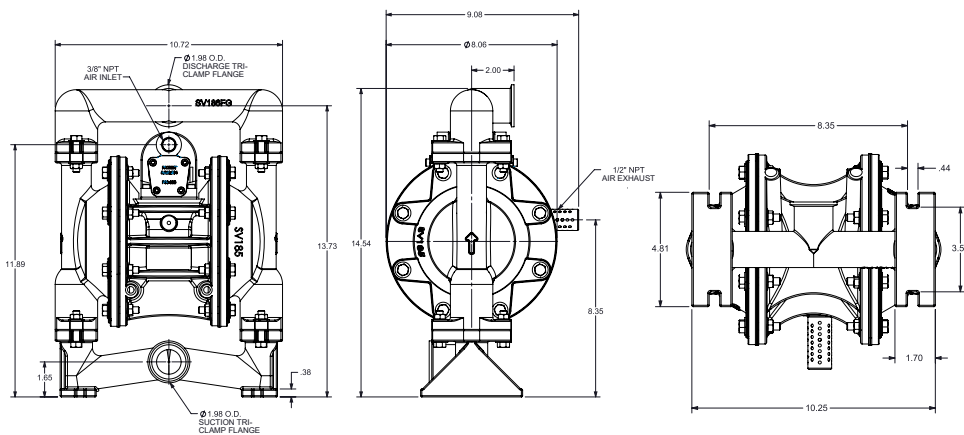

**VERSAMATIC®**

Warren Rupp, Inc. | A Unit of IDEX Corporation  
800 North Main Street | Mansfield, OH 44902 USA  
Phone: 419.526.7296 | Fax: 419.526.7289

[VERSAMATIC.COM](http://VERSAMATIC.COM)

e1mdICdsATEXFP-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.