


E3 DATA SHEET

SPECIFICATIONS & PERFORMANCE

3" Bolted Aluminum - ATEX with Metal Center Section

PERFORMANCE

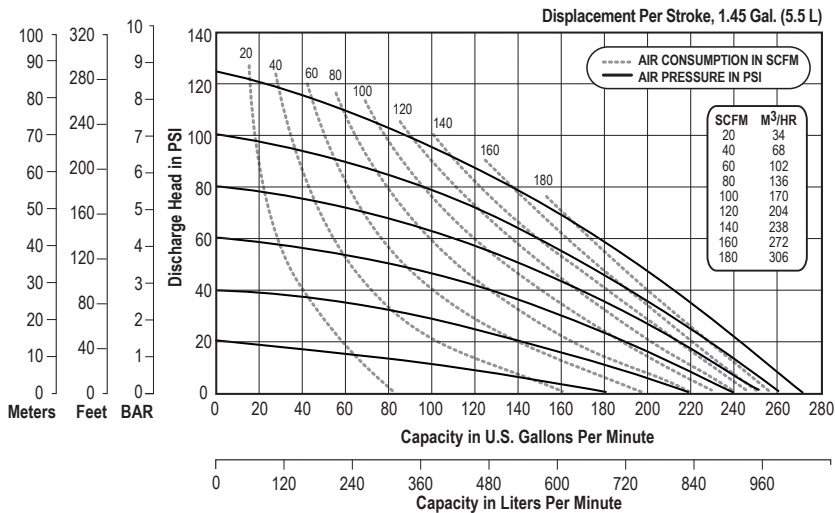

NOTE: Performance based on the following: elastomeric fitted pump, flooded suction, water at ambient conditions. The use of other materials and varying hydraulic conditions may result in deviations in excess of 5%.

SPECIFICATIONS

Flow Rate

Adjustable to 0-273 gpm (1,033 lpm)

Port Size

Suction 3" ANSI 150 lbs. Class (DIN80)

Discharge . . 3" ANSI 150 lbs. Class

Air Inlet 1/2" NPT

Air Exhaust 1" NPT

Suction Lift

Dry 16' (4.9 m)

Wet 31' (9.4 m)


Max Solid Size (Diameter)

. 3/8" (9.5 mm)

Max Noise Level 93 dB(A)

Shipping Weights

Aluminum 146 lbs. (66.2 kg)

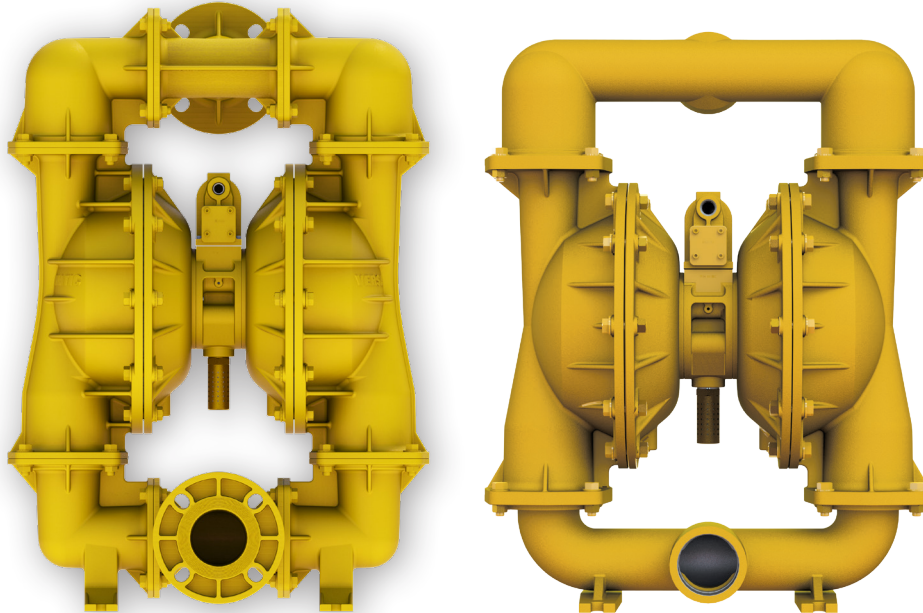

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e3mdlCdsATEXAB-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.

E3 DATA SHEET


SPECIFICATIONS & PERFORMANCE

3" Bolted Aluminum - ATEX with Metal Center Section

DIMENSIONS

E3 Bolted Aluminum - ANSI Flange


Dimensions in inches (metric dimensions in brackets). Dimensional Tolerance .125" (3mm).

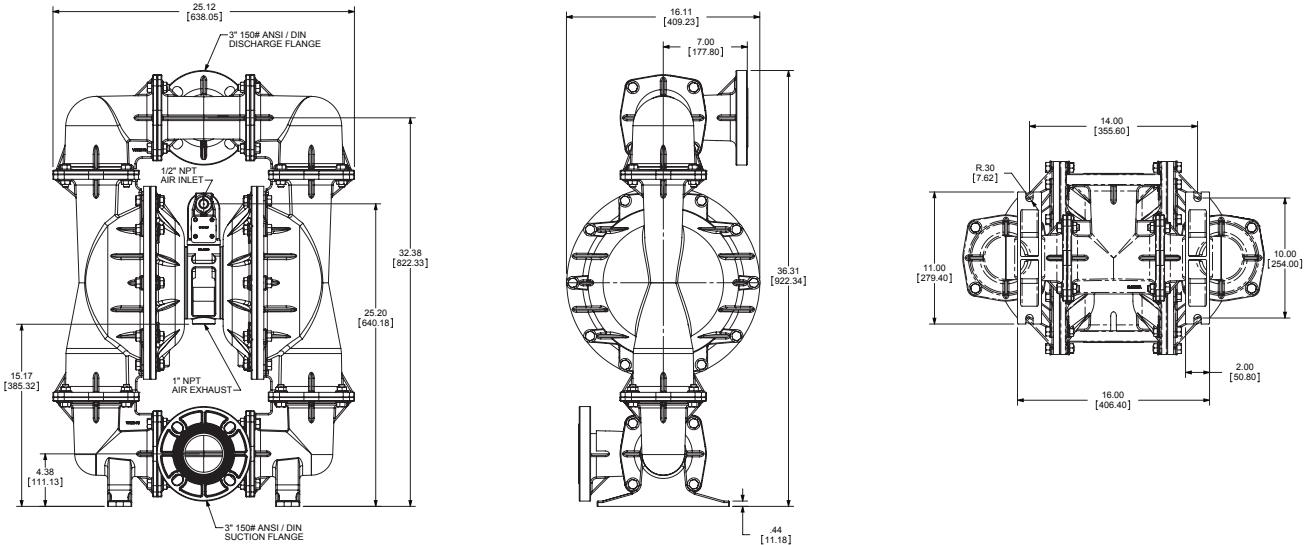

E3 Bolted Aluminum - NPT / BSP

Dimensionally Interchangeable with Versa-Matic and Wilden Clamped Pumps

Dimensions in inches (metric dimensions in brackets). Dimensional Tolerance .125" (3mm).

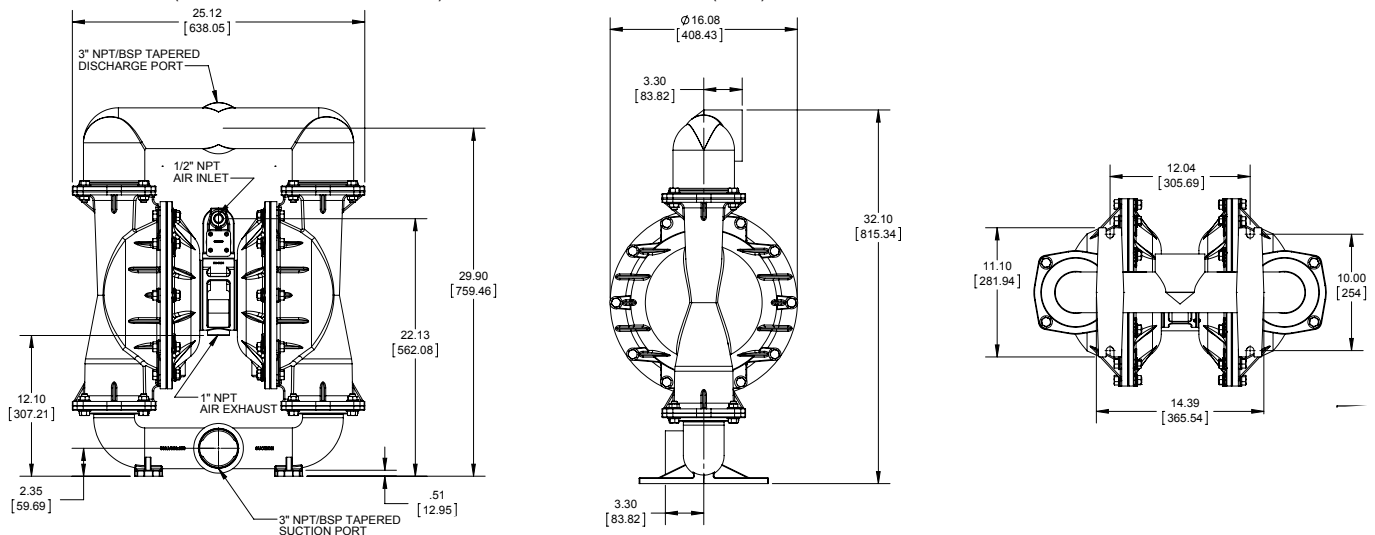

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e3mdlCdsATEXAB-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.