PRODUCT SELECTION GUIDE

* 180-A = 180° Away from the inlet, 180-T = 180° Towards the inlet
The above selection guide is only provided as an assistance to the cleaner selection process. GEA's policy of continued improvement means that specifications may vary without prior notice.

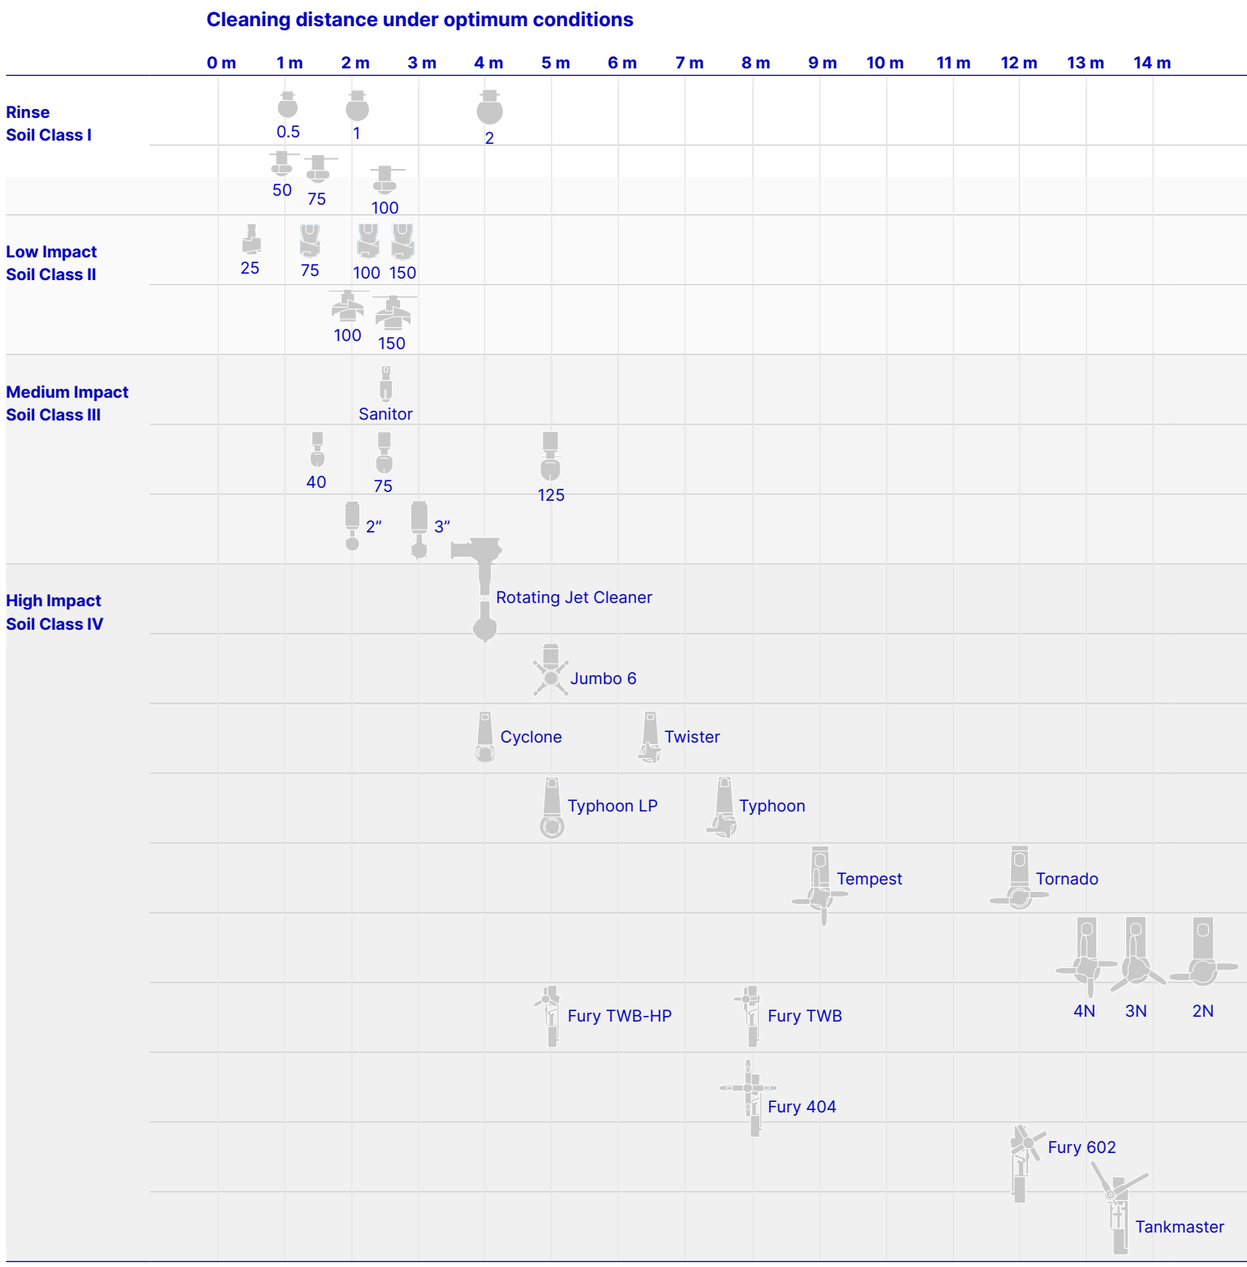

Cleaner	Type	Mounting Options	Coverage [deg]*	Pressure [bar]	Flow range [l/min]	ATEX	Beverage, Wine Brewery, Distillery	Food & Dairy	Transport	(Bio-) Chemical	Pharma/ Personal Care	Pulp & Paper	Utilities
Spray Balls			Various	1.0 – 2.5 Optimum 2	40 – 1110	Ex	•	•	•	•	•	•	
Torus/Chemitorus 50, 75 & 100			360 180-A 180-T	1– 4 Optimum 2	15 – 118	Ex	•	•		•	•		
Turbodisc/Chemidisc 25, 75, 100 & 150			360 180-A 180-T	2 – 4 Optimum 3	40 – 245	Ex	•	•	•	•	•	•	
Clipdisc 100 & 150			360	1 – 4 Optimum 3	100 – 263	Ex	•	•	•		•		
Sanitor			360	3 – 10 Optimum 4	25 – 80	Ex	•	•	•	•	•		
Turbo SSB 40, 75 & 125			360	2 – 6 Optimum 3	38 – 408	Ex	•	•	•	•	•	•	
Troll Ball 2" & 3"			360 180-A 180-T	3 – 20 Optimum 5	50 – 283		•	•		•	•		
Rotating Jet Cleaner ZR			Various	2.3 – 4.3 Optimum 3	116 – 483		•						
Jumbo 6			360	4 – 10 Optimum 6 – 8	180 – 500		•	•	•	•	•	•	
Cyclone/Twister			360	4 –10 Optimum 6 – 8	45 – 97	Ex	•	•		•	•		
Typhoon LP/Typhoon			360	4 – 10 Optimum 6 – 8	93 – 175	Ex	•	•	•	•	•		
Tempest/Tornado			360	4 –10 Optimum 6 – 8	200 – 378	Ex	•	•	•	•	•	•	
OC 200 4N, 3N & 2N			360	4 –10 Optimum 6 – 8	317 – 1083		•	•	•	•	•	•	
Fury TWB & TWB-HP			360	TWB: 5 – 25, Opt. 15, TWB HP: 5 – 90, Opt. 30	25 – 200				•	•			
Fury 404			360 180-A 180-T	4 –10 Optimum 6 – 8	50 – 180		•		•	•		•	•
Fury 602			360 180-A 180-T	4 –10 Optimum 6 – 8	280 – 600		•		•			•	•
Tankmaster			180-A 180-T	4 –10 Optimum 8	466 – 592								•