



TRA® 10 Series Positive Displacement Pumps

Section	100
Page	100.7
Issue	C

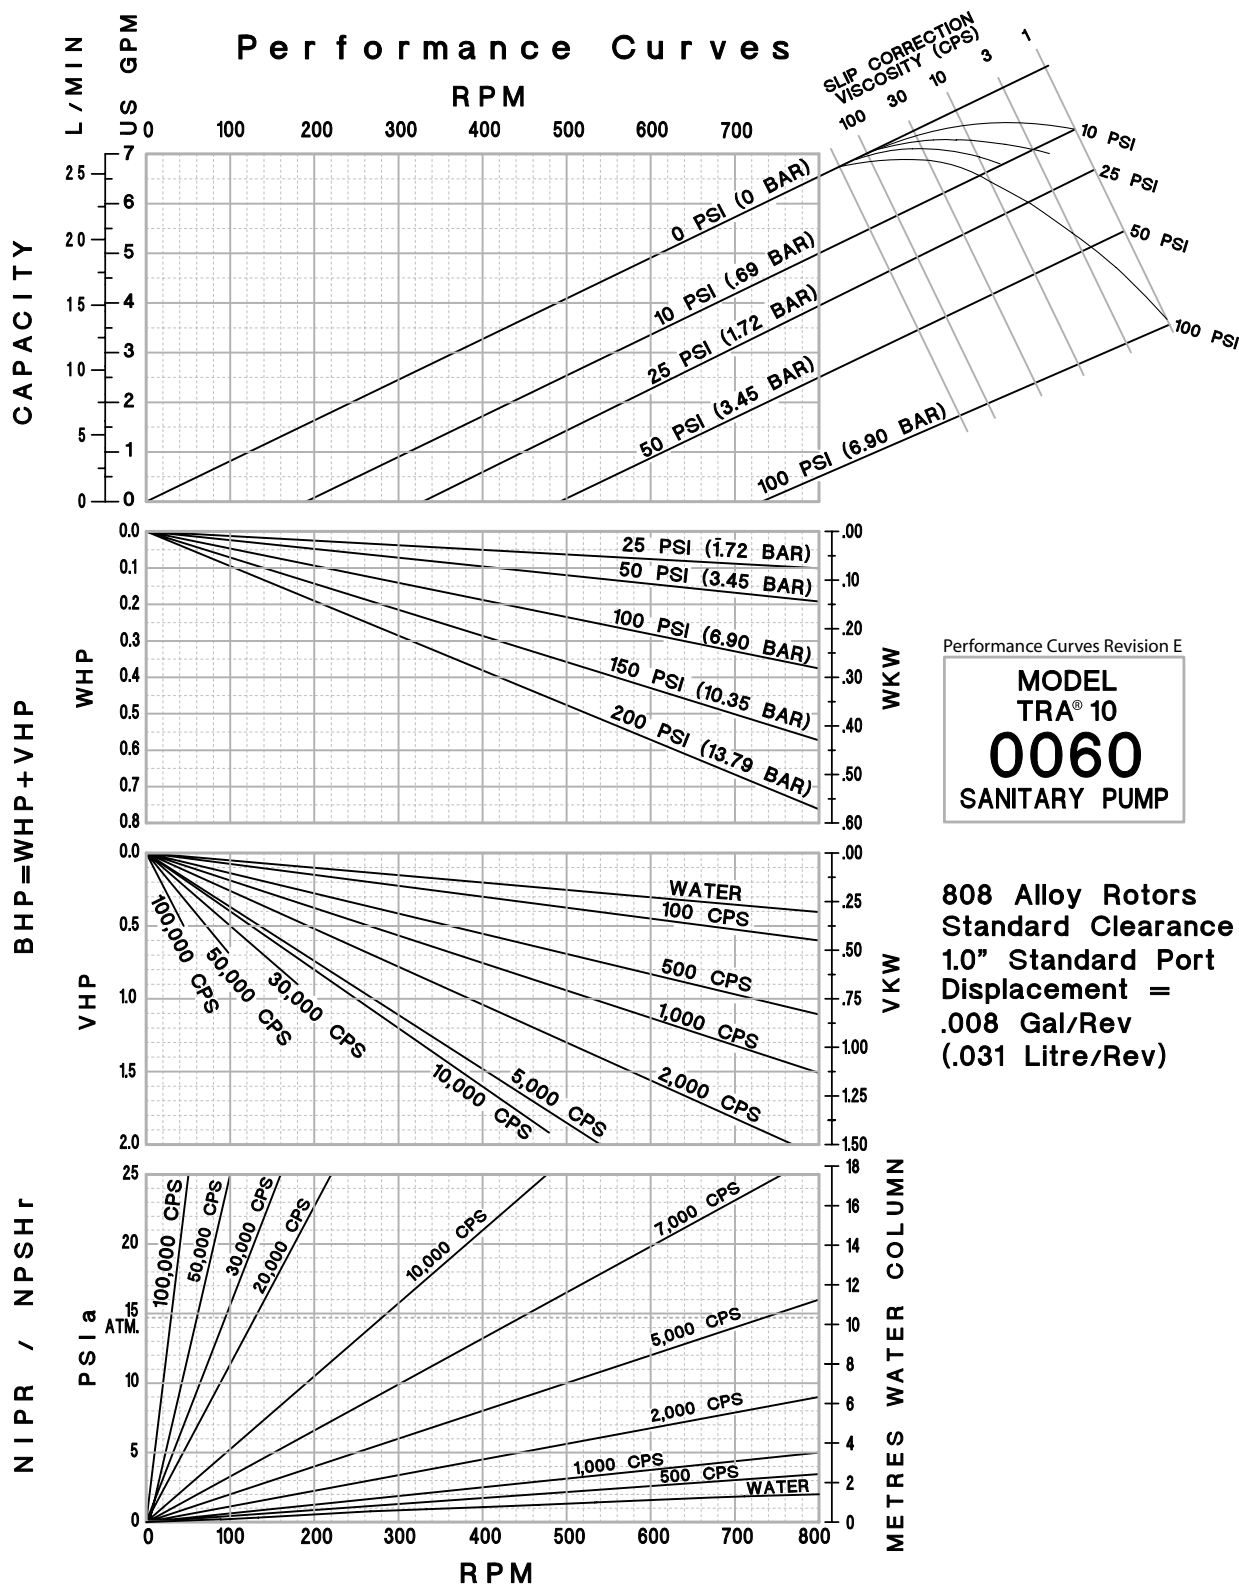


Section	100
Page	100.8
Issue	C

TRA® 10 Series Positive Displacement Pumps

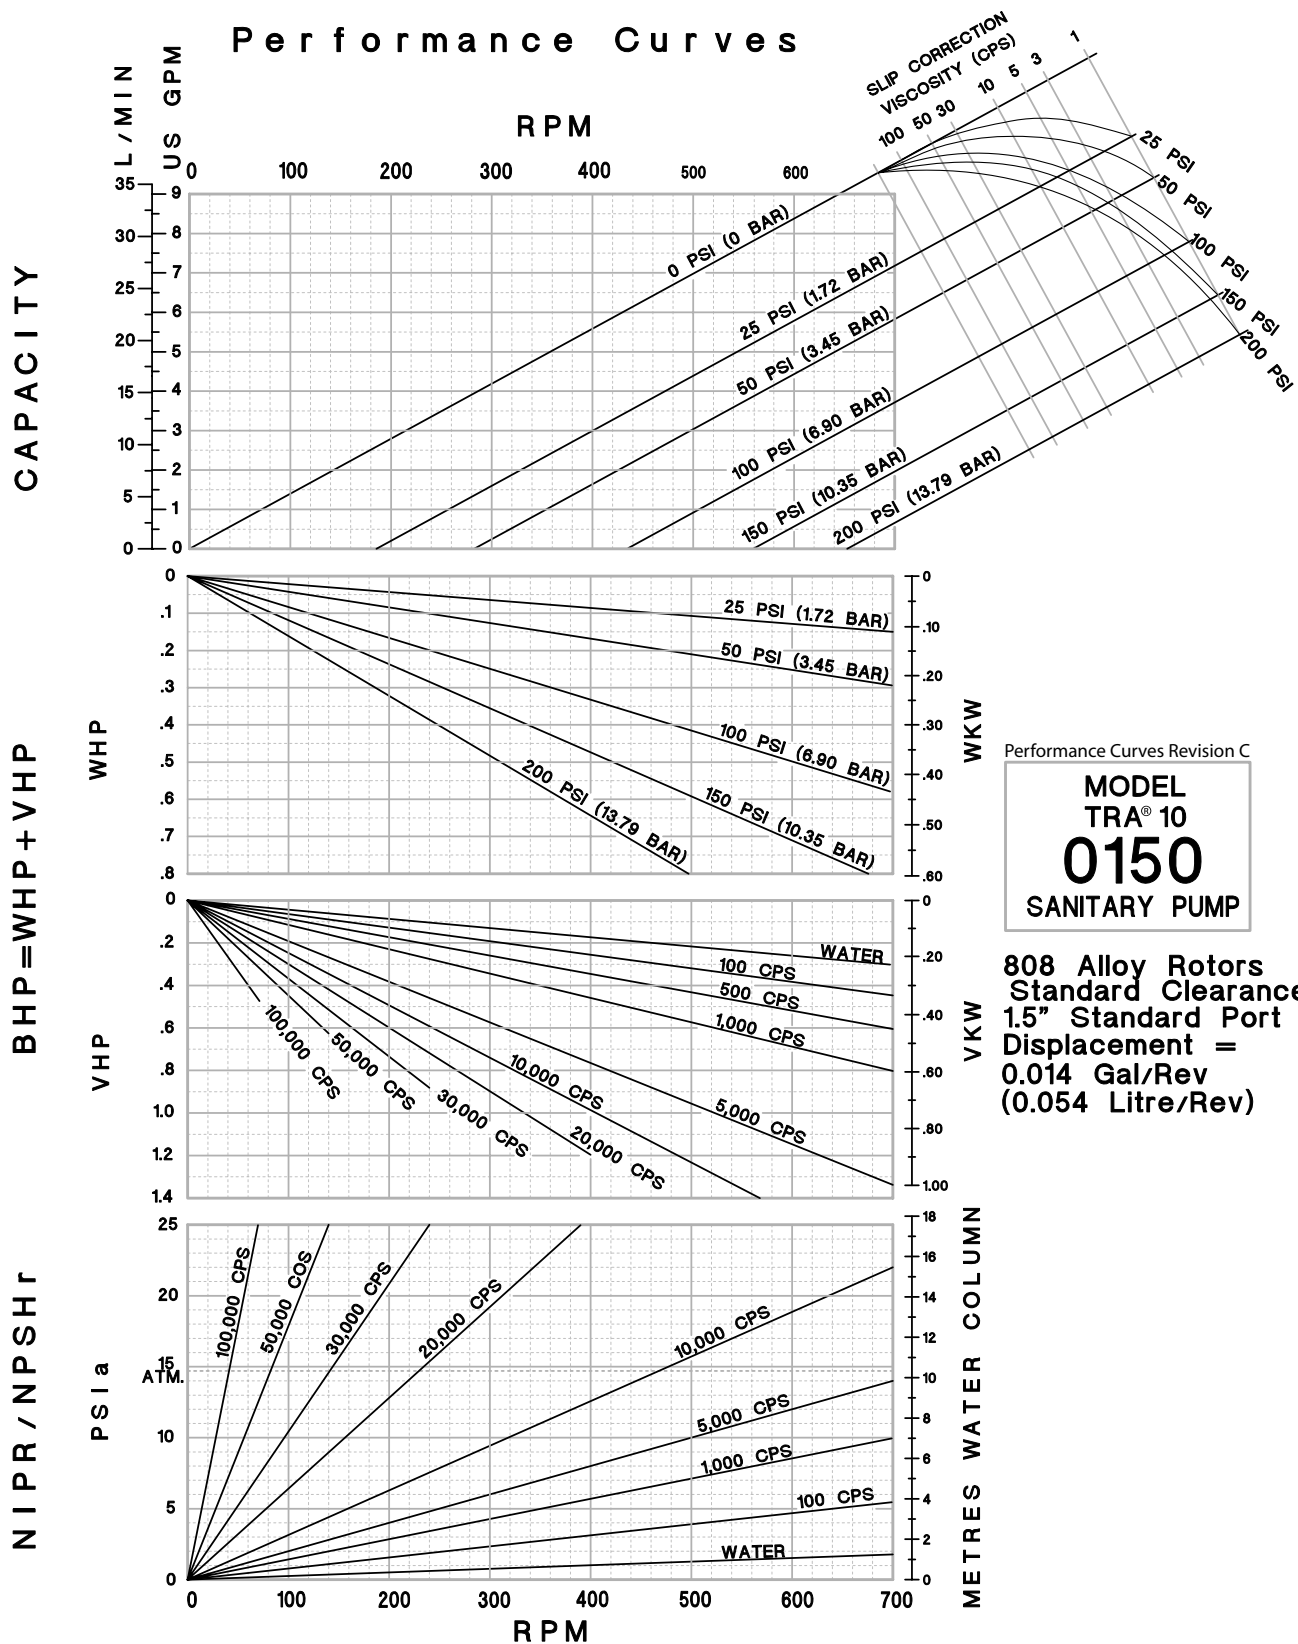


TRA® 10 Series Positive Displacement Pumps

Section	100
Page	100.9
Issue	C

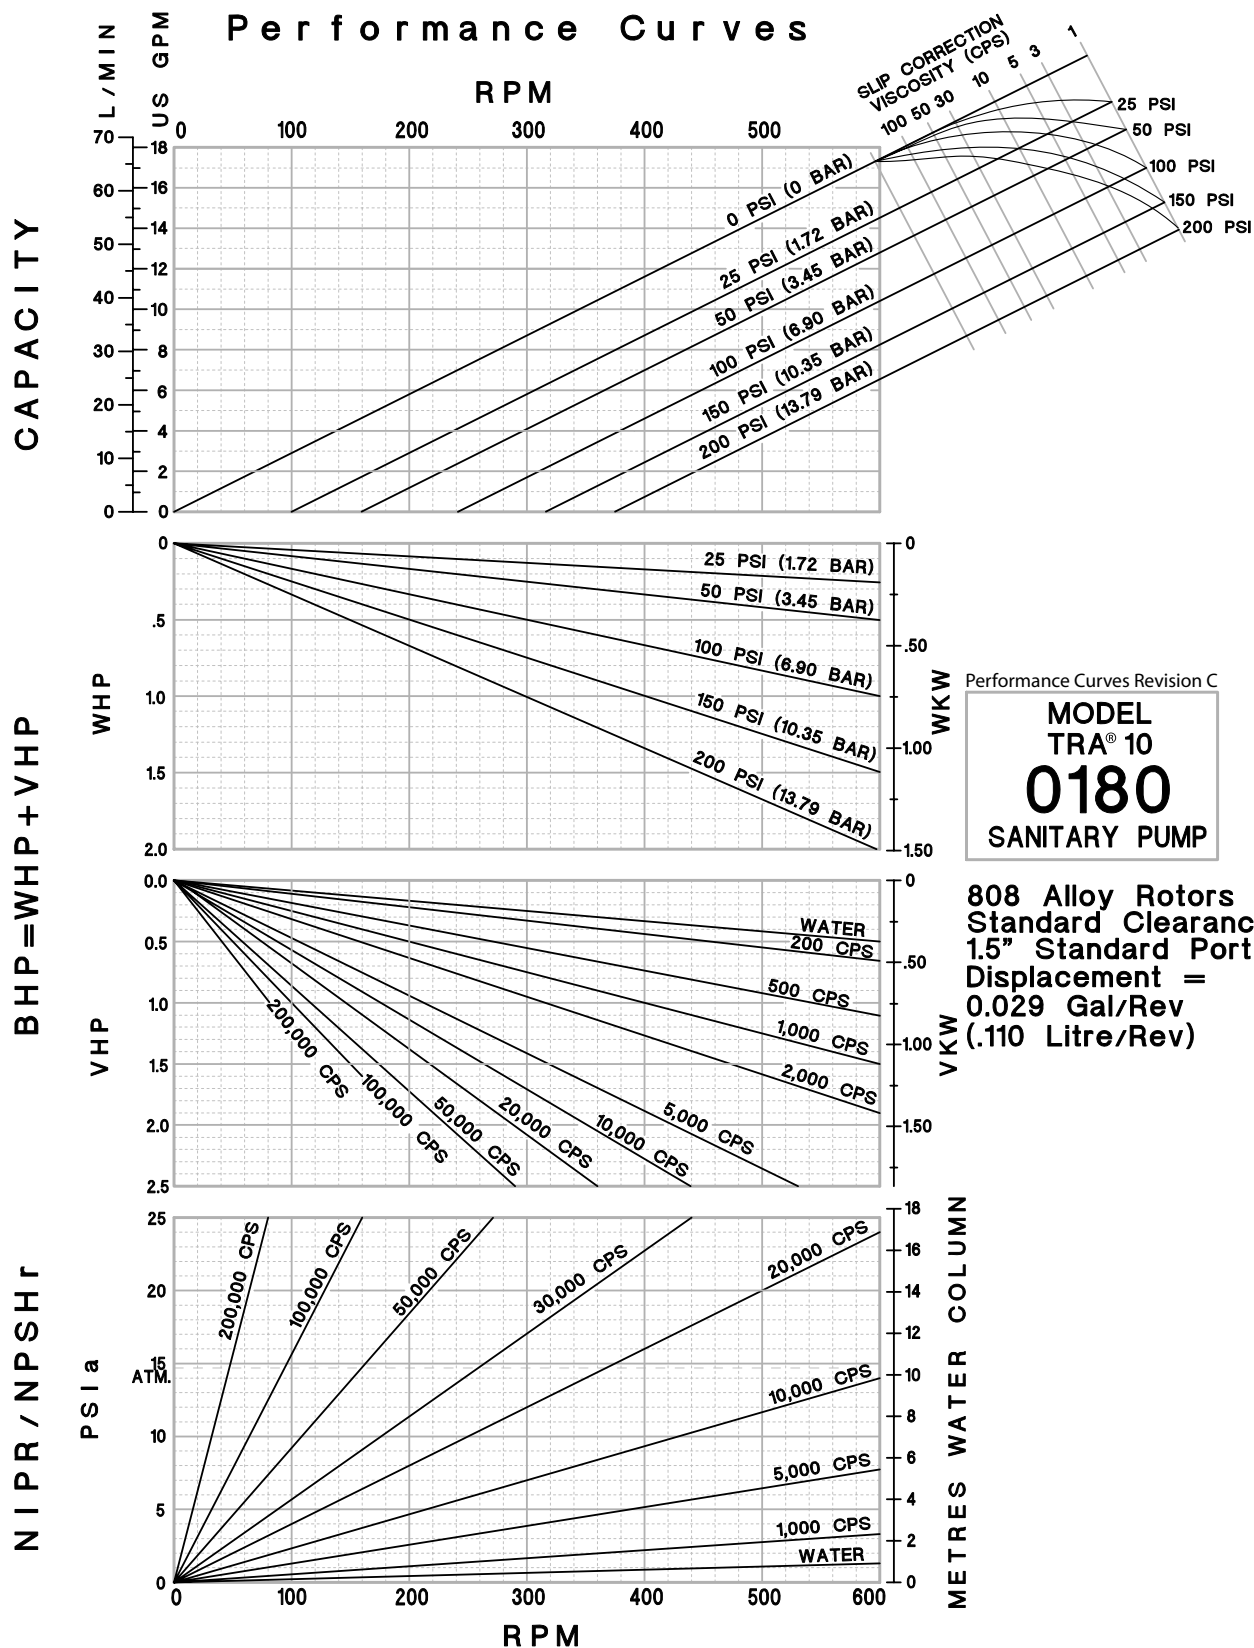


Section	100
Page	100.10
Issue	C

TRA® 10 Series Positive Displacement Pumps

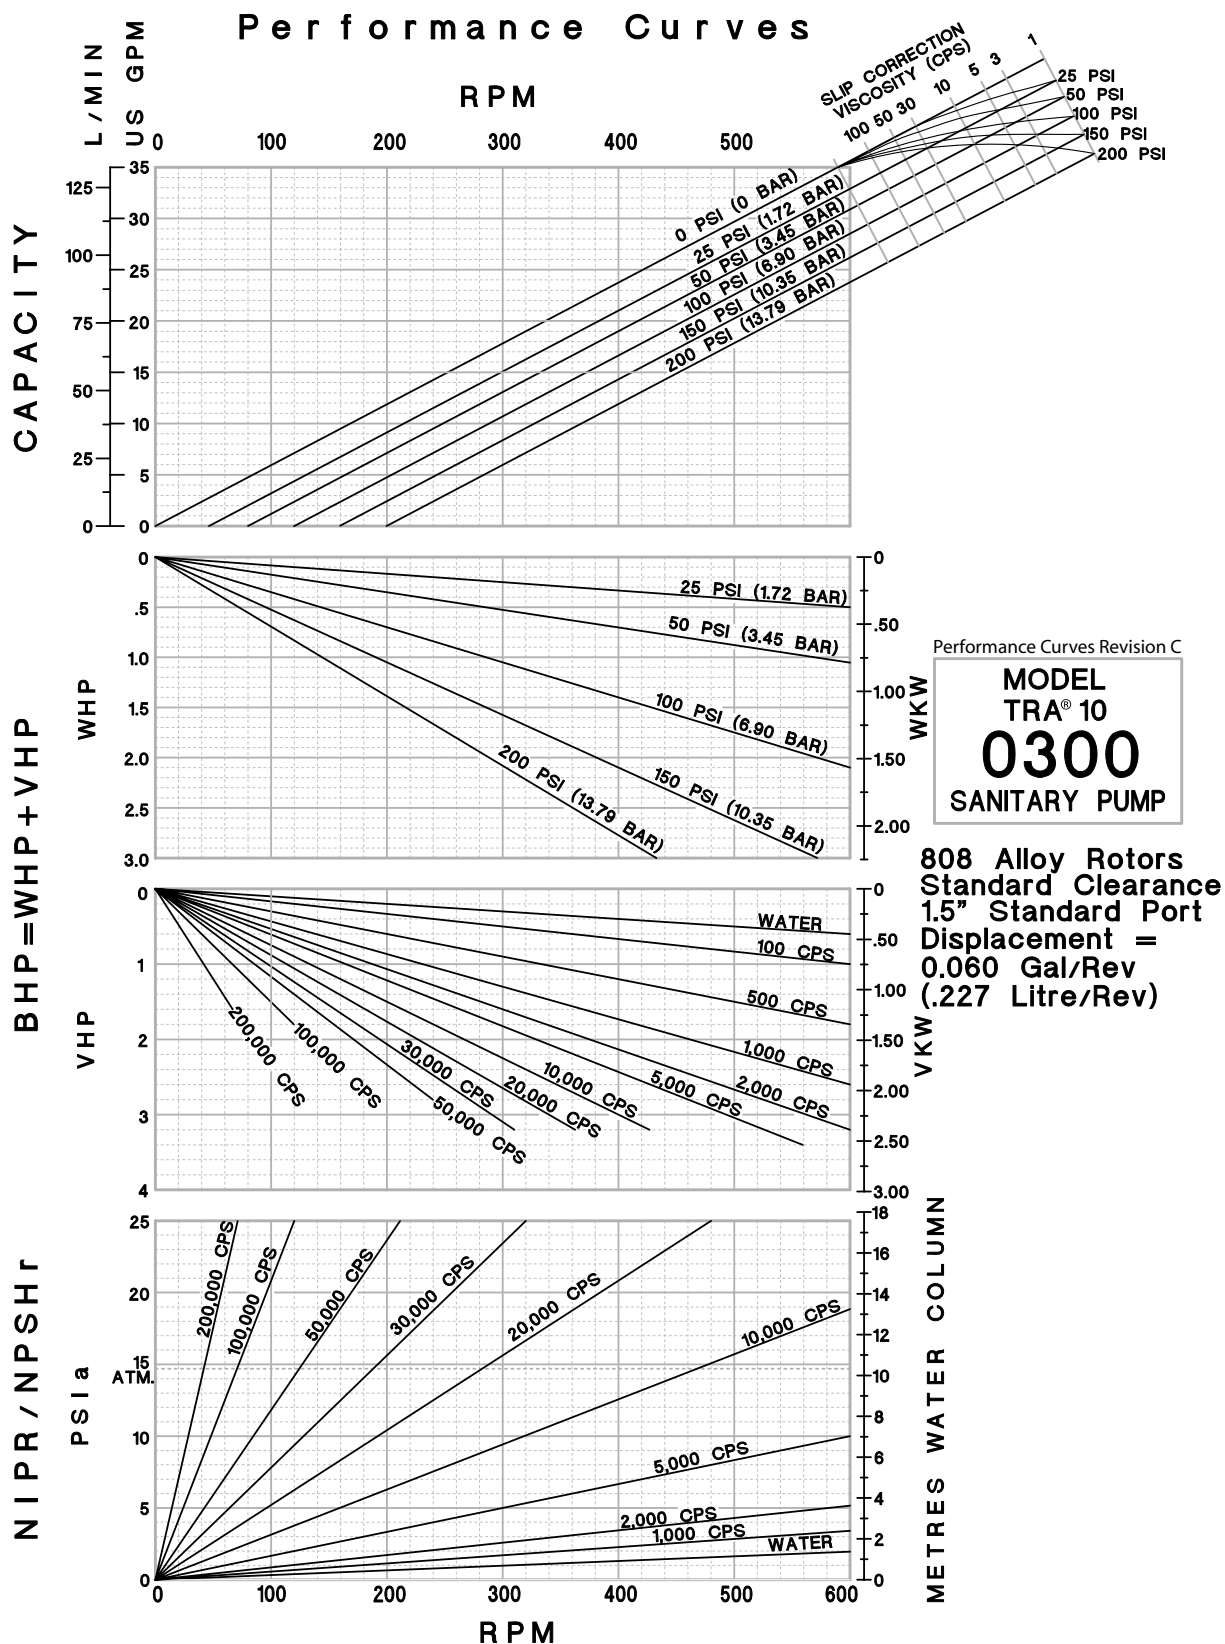

TRA® 10 Series Positive Displacement Pumps

Section	100
Page	100.11
Issue	C

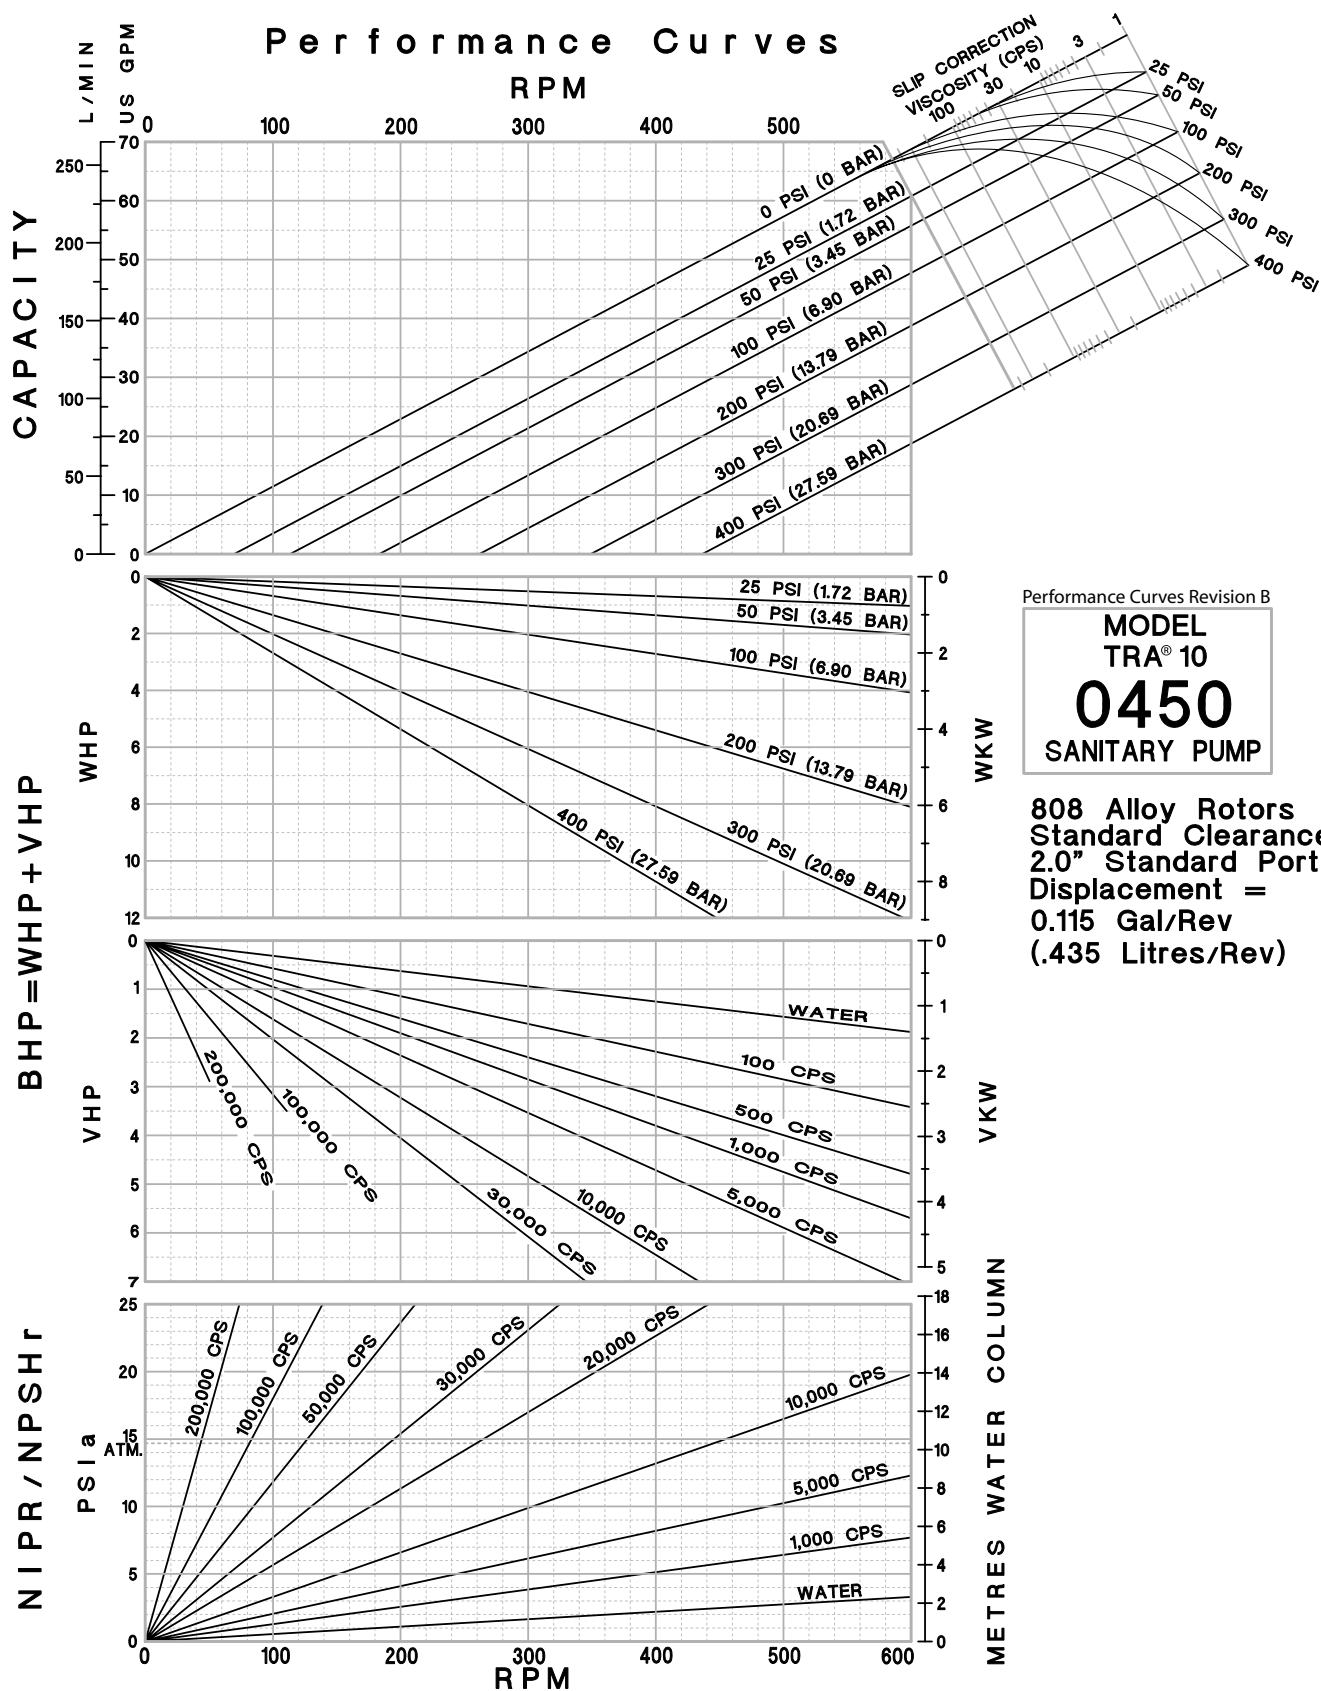


Performance Curves Revision B

MODEL
TRA® 10
0450
SANITARY PUMP

808 Alloy Rotors
Standard Clearance
2.0" Standard Port
Displacement =
0.115 Gal/Rev
(.435 Litres/Rev)

Section	100
Page	100.12
Issue	C

TRA® 10 Series Positive Displacement Pumps

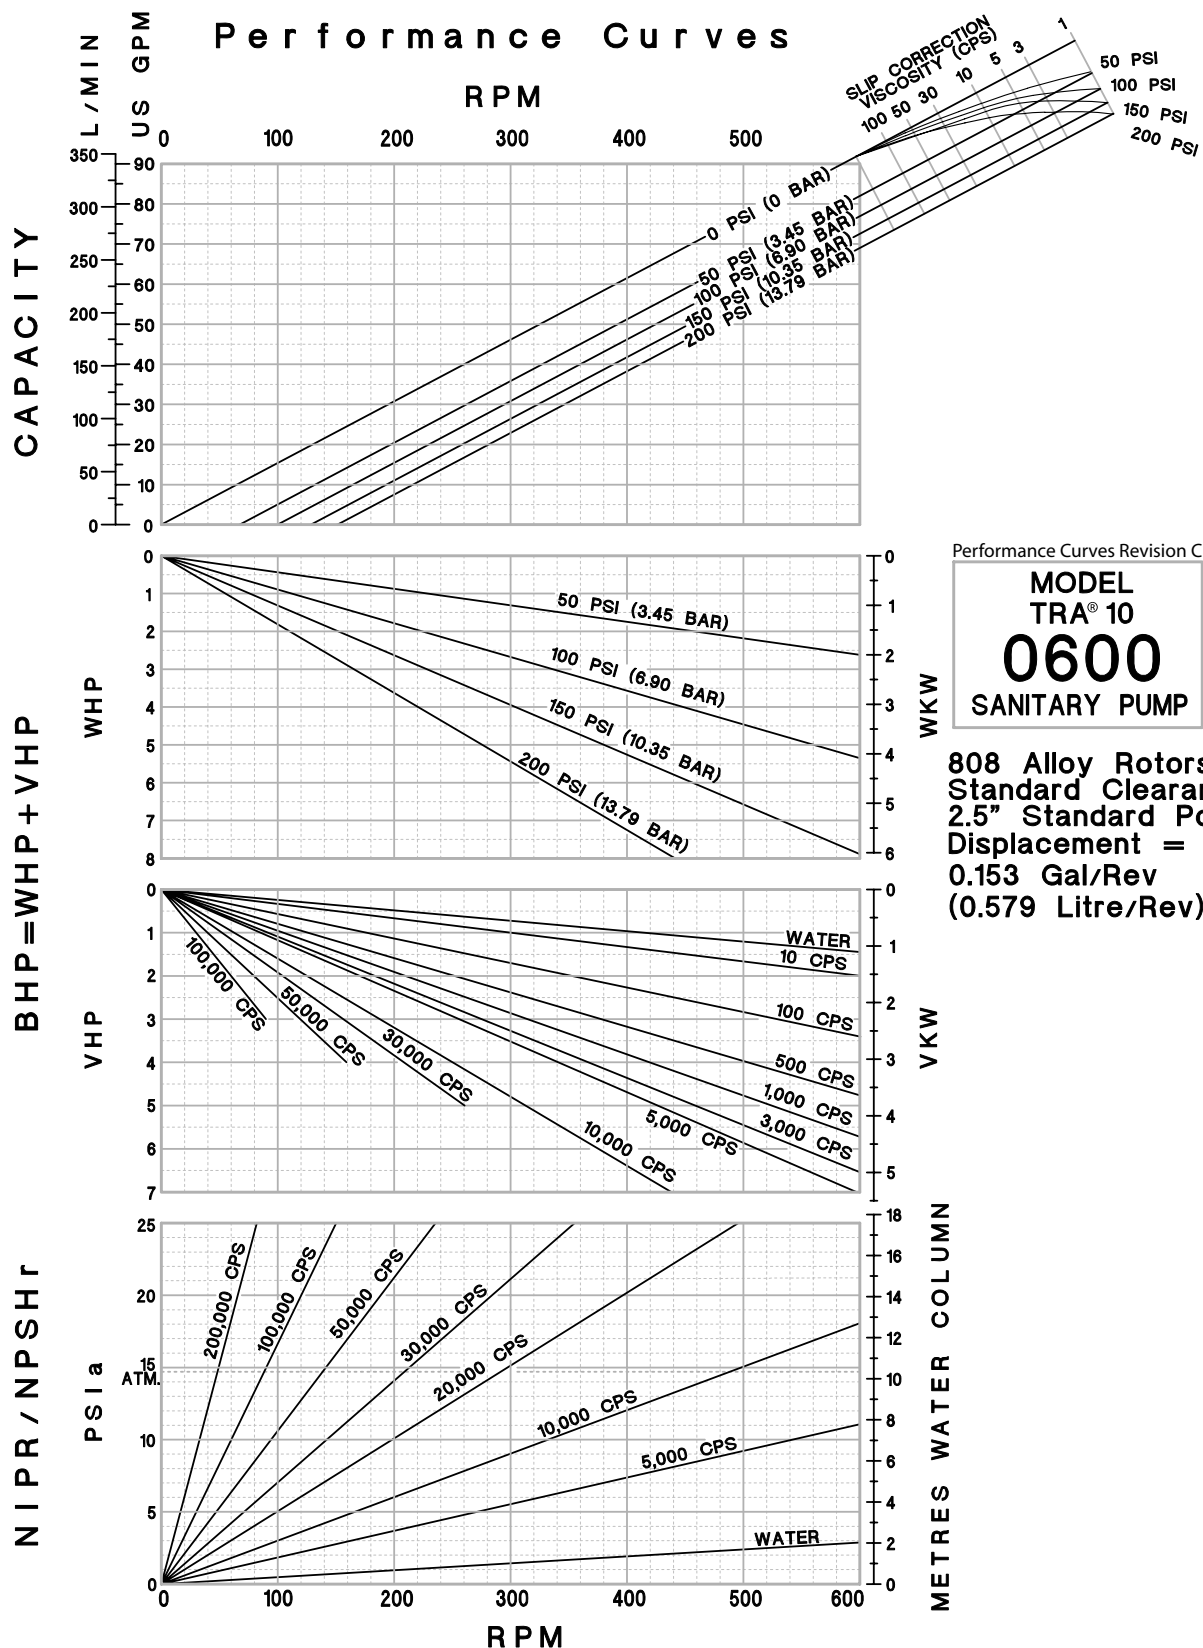


Performance Curves Revision C

MODEL
TRA® 10
0600
SANITARY PUMP

808 Alloy Rotors
Standard Clearance
2.5" Standard Port
Displacement =
0.153 Gal/Rev
(0.579 Litre/Rev)


TRA® 10 Series Positive Displacement Pumps

Section	100
Page	100.13
Issue	C

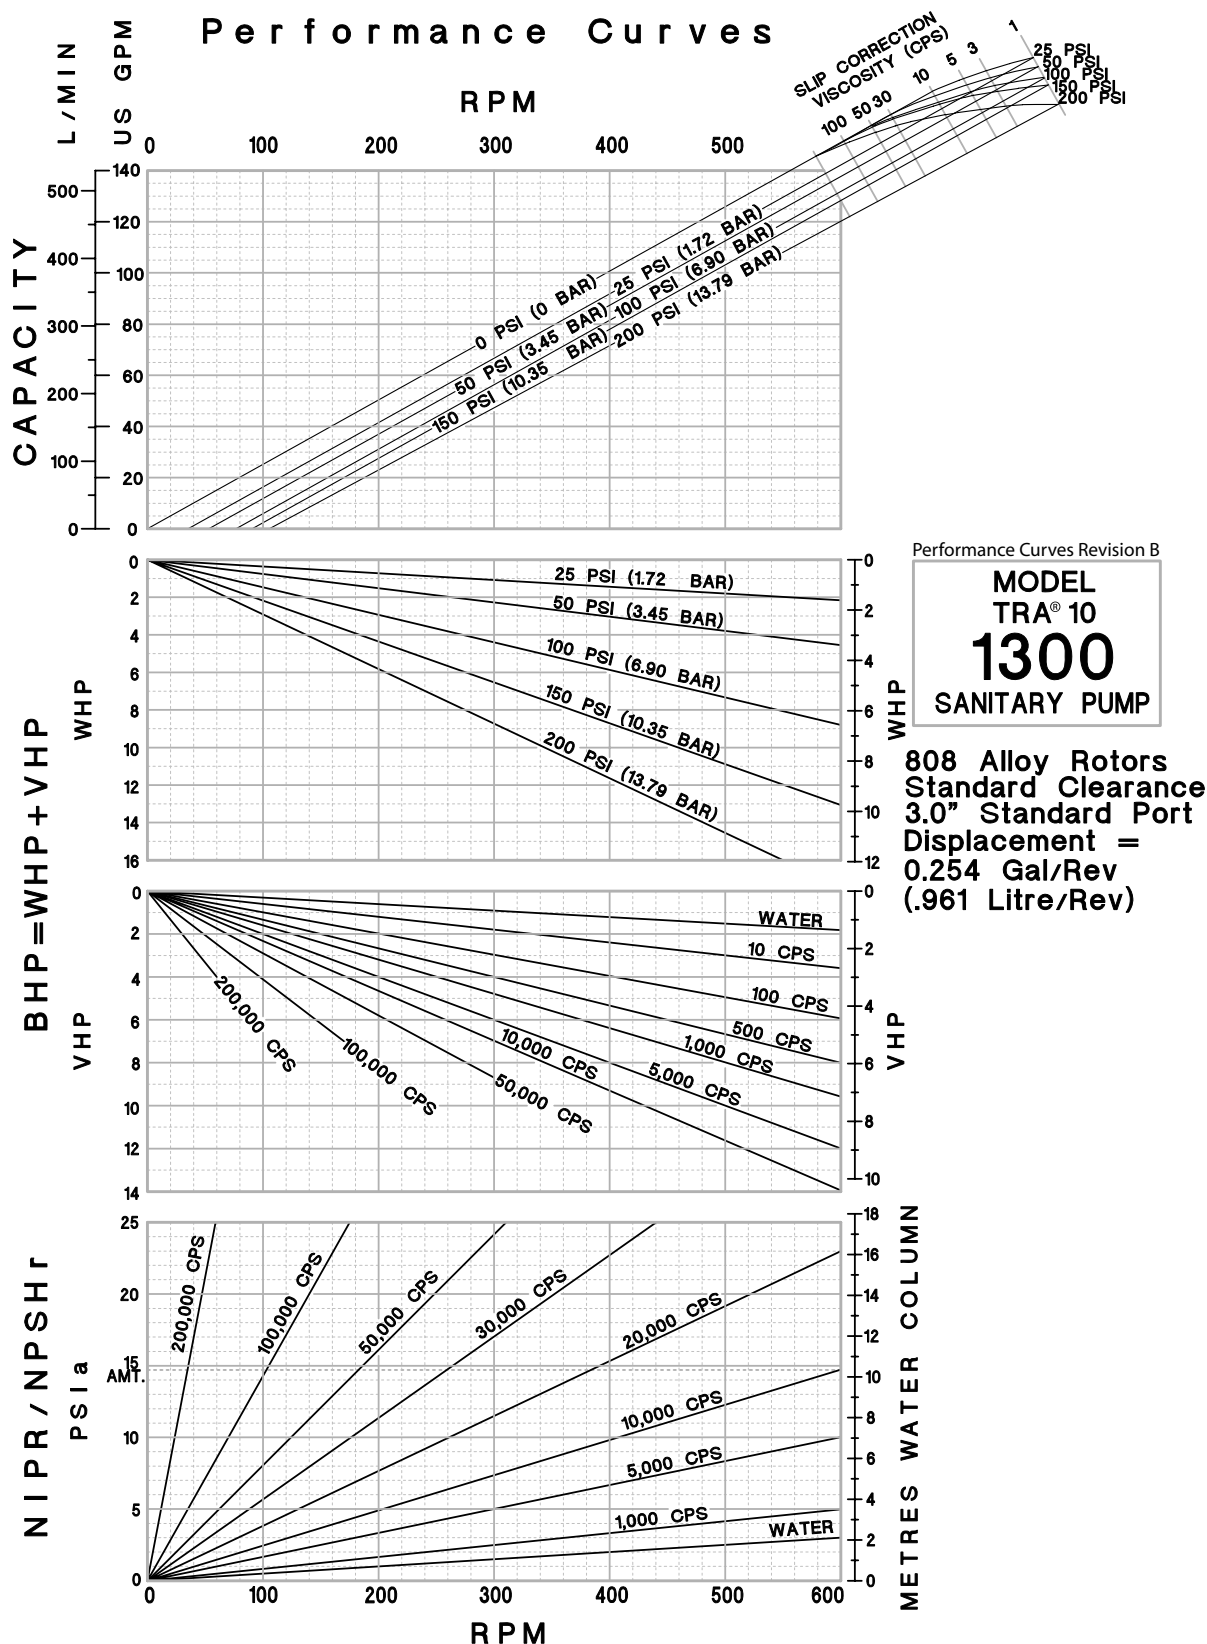

Section	100
Page	100.14
Issue	C

TRA® 10 Series Positive Displacement Pumps

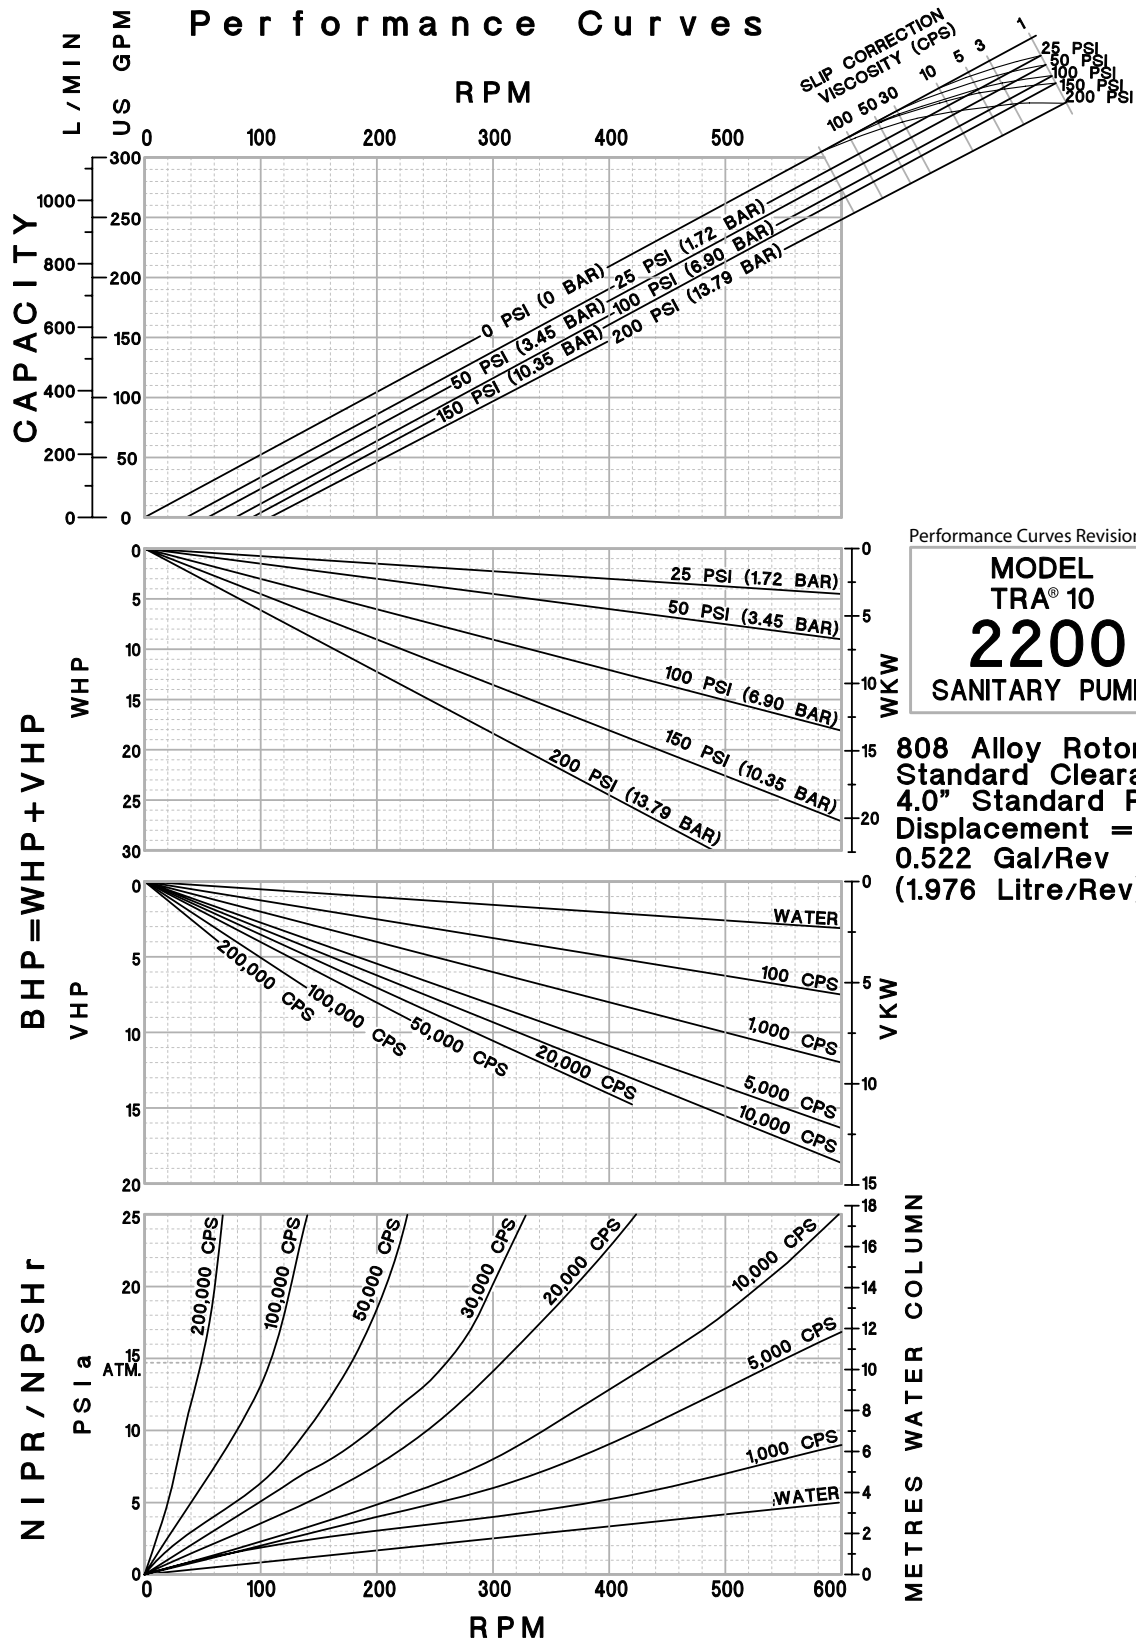

TRA® 10 Series Positive Displacement Pumps

Section	100
Page	100.15
Issue	C

