


P-SERIES - P35 P/D



Please note that when a pump is fitted with Teflon® diaphragms, a capacity reduction of up to 15% may occur.

| MATERIAL | | | SPECIFICATION | | | | | | |
|--------------|-----------------------------|-----------------------------|---------------|----------------------|-----------|-------------------|----------------|--------------------|--------|
| Pump housing | Diaphragms | Valve balls | Max capacity | Max working pressure | Max Temp. | Liquid connection | Air connection | Particle size max. | Weight |
| PP, PVDF | PTFE, Buna-N, EPDM, Vitron® | PTFE, Buna-N, EPDM, Vitron® | 100 l/min | 7 bar | 60/90 °C | R1" female | R½" female | 5 mm | 11 kg |

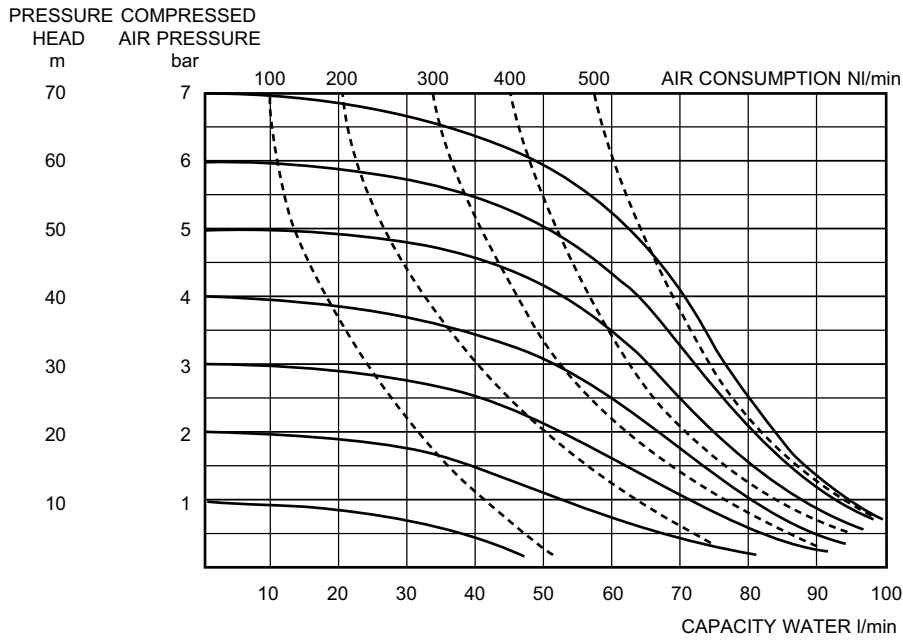