ACRO SPECIAL 6287 and 6288 Series Valves

Model	6287-12VDC	6287-24VDC	6287-120VAC
Valve Symbol			
Media	Air		
Type	5 Port, 2 Position		
Actuation	Solenoid, Internally Piloted		
Cv	0.67		
Port Size	1/8 NPT		
Filtration	40µ Min.		
Lubrication	None Required		
Pressure Range	22-120 PSI (1.5-8.2 Bar)		
Temperature Range	-4-158 °F (-20-70 °C)		
Voltage Range	±10%		
Power Consumption	2.5W	2.5W	2.5VA

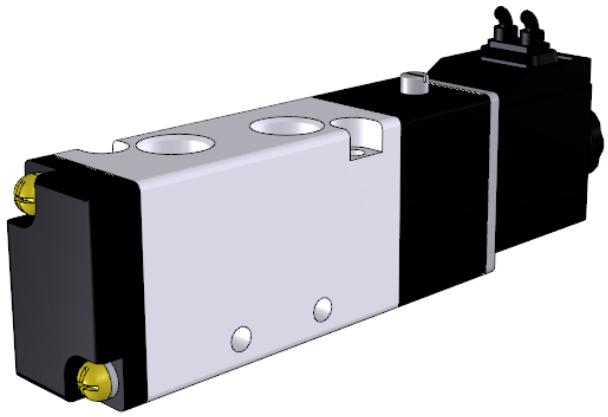

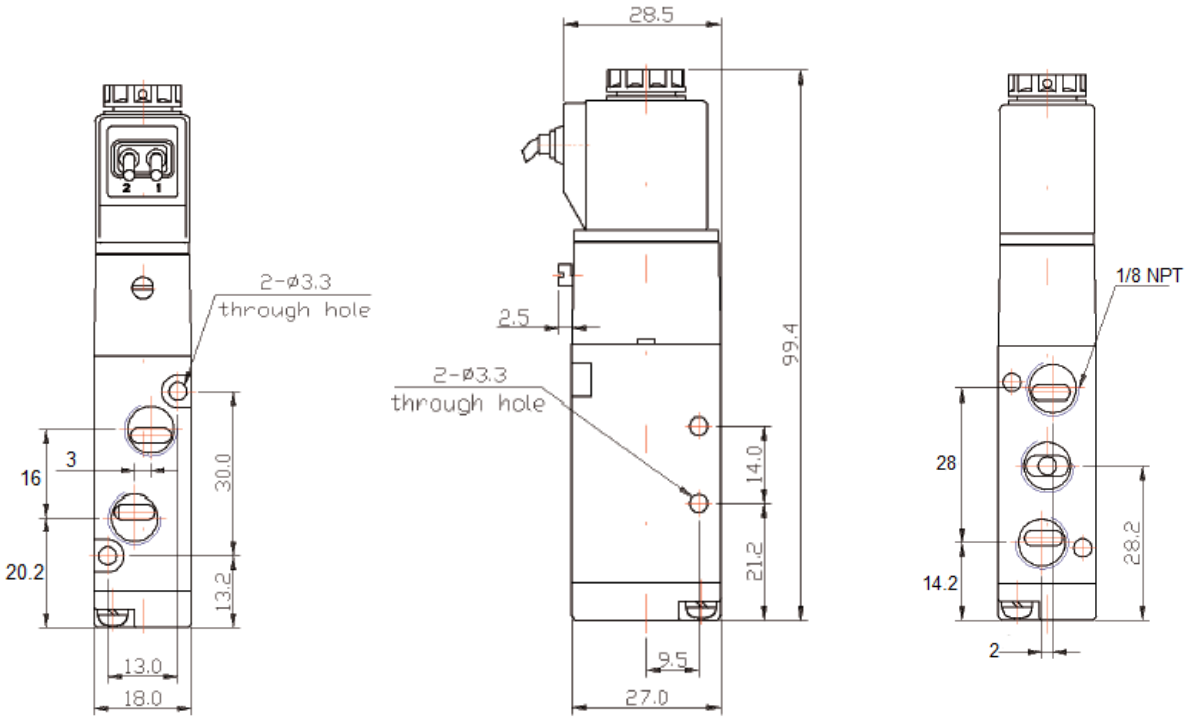
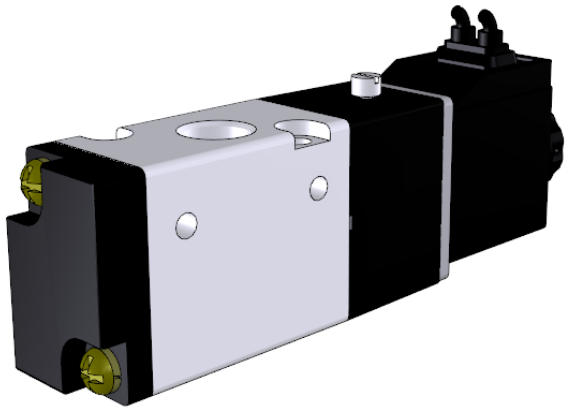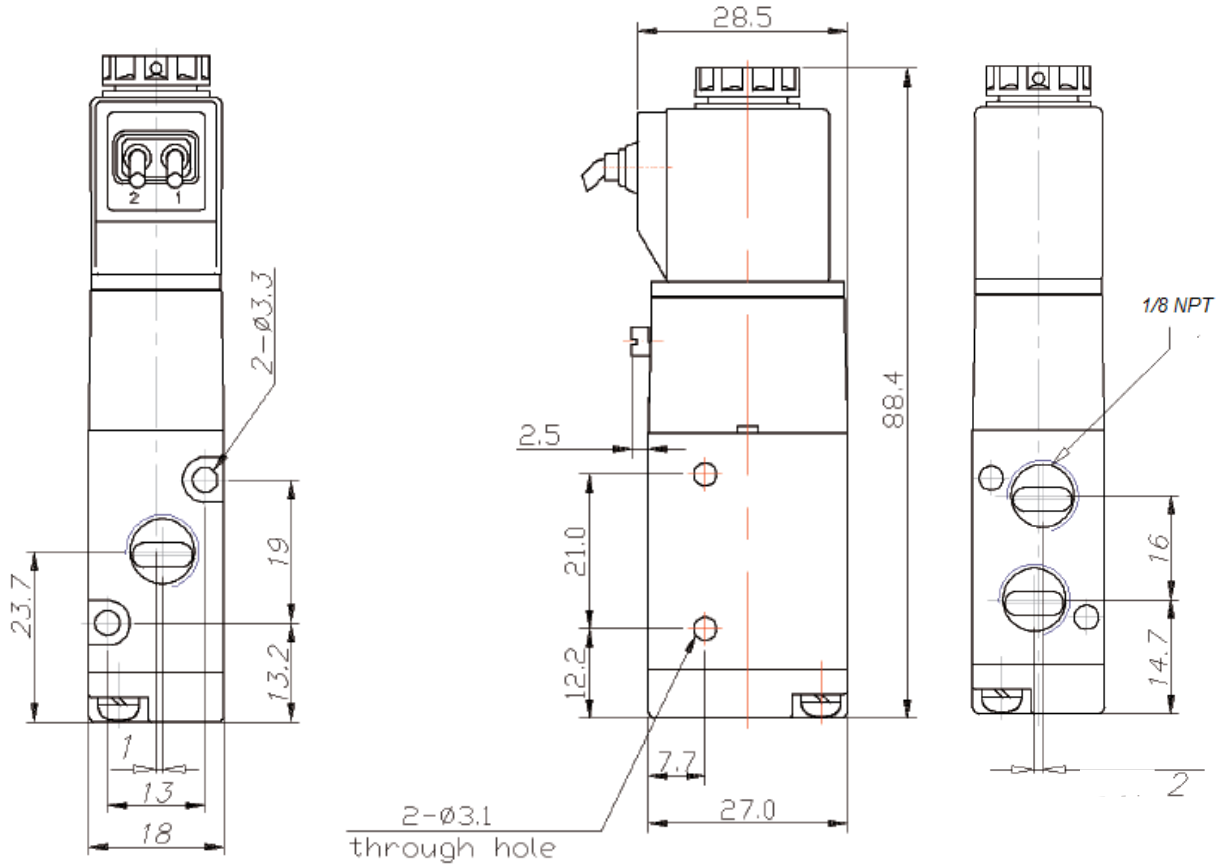
Model	6288-12VDC	6288-24VDC	6288-120VAC
Valve Symbol			
Media	Air		
Type	3 Port, 2 Position		
Actuation	Solenoid, Internally Piloted		
Cv	0.67		
Port Size	1/8 NPT		
Filtration	40µ Min.		
Lubrication	None Required		
Pressure Range	22-120 PSI (1.5-8.2 Bar)		
Temperature Range	-4-158 °F (-20-70 °C)		
Voltage Range	±10%		
Power Consumption	2.5W	2.5W	2.5VA